

CS 10:


Problem solving via Object Oriented
Programming

Inheritance

Today main learning objectives


1. Create a subclass applying the inheritance concept
2. Identify relationship between class and subclasses
3. Identify methods that are in common to all classes and their default behavior
4. Write methods to override
5. Use arrays to hold objects (and identify relationship with subclasses)
6. Identify modifiers behaviors

Agenda

- 
1. Inheritance
 2. Comparing objects
 3. Small example application
 4. Access modifiers

OOP relies on four main pillars to create robust, adaptable, and reusable code

Four “pillars” of OOP

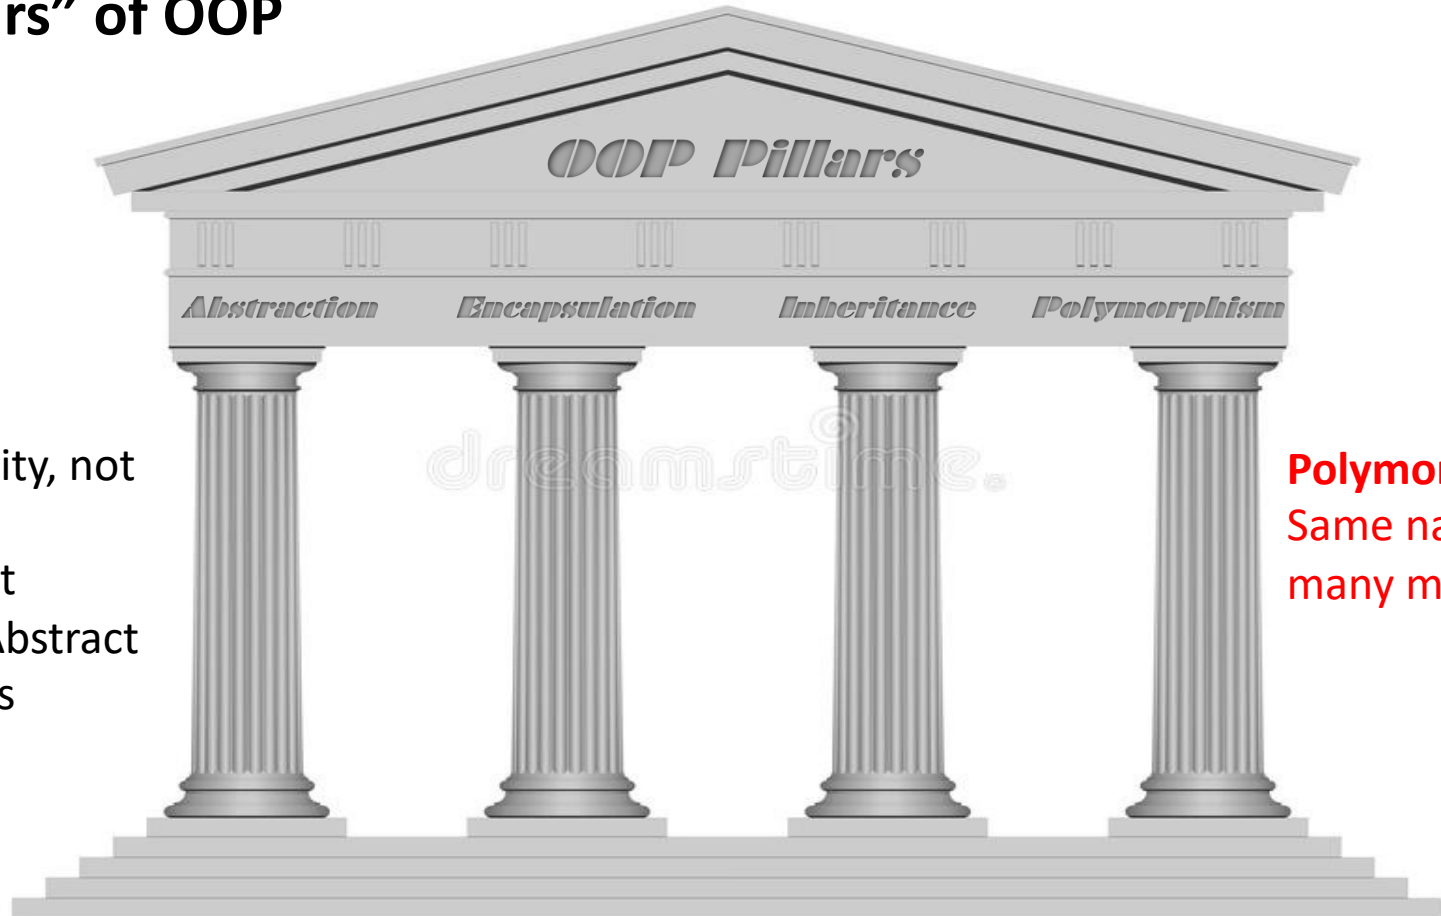

Abstraction

- Name functionality, not how to implement
- Leads to Abstract Data Types (ADTs)

Polymorphism
Same name,
many meanings

Encapsulation

- Bind code and data into one thing called an object
- Code called methods in OOP (not functions)

Inheritance

- Create specialty versions that “inherit” functionality of parent
- Reduces code

Problem


Dartmouth wants to have a “college application” that stores information about instructors and students.



How should we structure
the code?

Inheritance allows us to reuse code that has already been written and debugged

College application

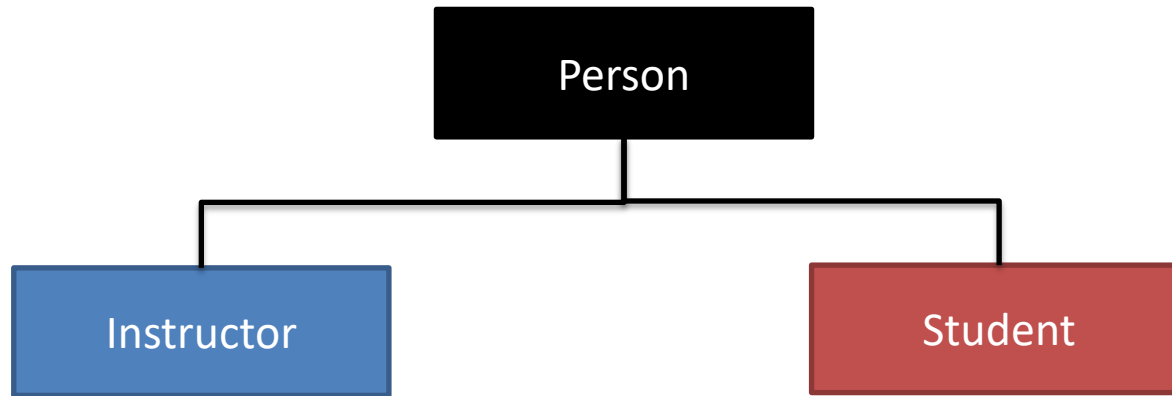

The Person base class has instance variables and methods

Person.java

```
public class Person {
    String name;
    String Id;

    public Person(String name, String Id) {
        this.name = name;
        this.Id = Id;
    }


    public String getName() { return name; }
    public String getId() { return Id; }

    public void setName(String name) {this.name = name; }
    public void setId(String Id) { this.Id = Id;}

    /**
     * Returns a String representation of a Person
     * @return String
     */
    public String toString() {
        String s = "Name: " + name + " (" + Id + ")";
        return s;
    }
}
```

Subclasses inherit the instance variables and methods of the base class

College application

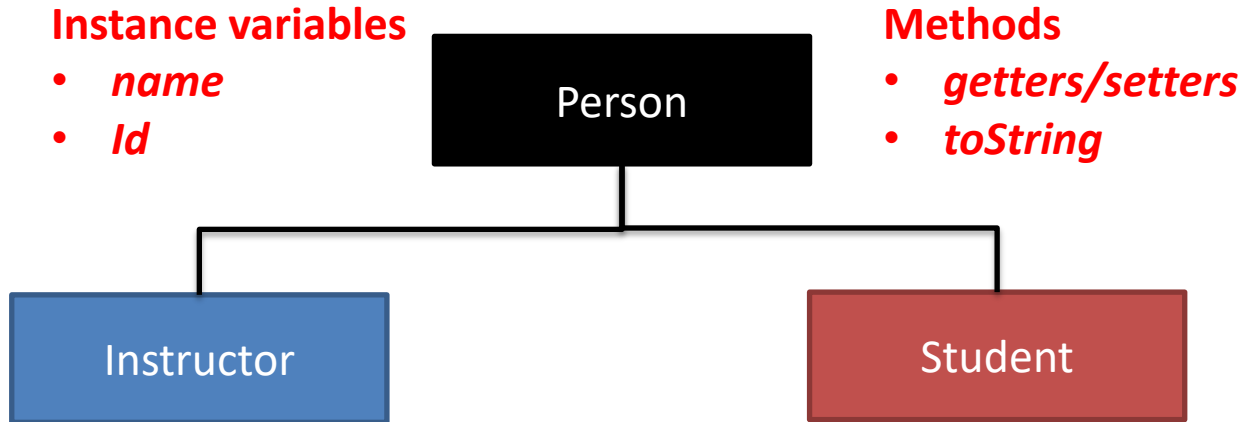

Use “extends” to inherit instance variables and methods from base class

Instructor.java

```
public class Instructor extends Person {
    boolean tenured;
    int yearsEmployed;
    String department;

    public Instructor(String name, String Id) {
        super(name, Id);
        this.tenured = false; //not required, Java initializes boolean instance variables to false
        this.yearsEmployed = 0; //not required, Java initializes numeric values instance variables to 0
        this.department = null; //not required, Java initializes objects to null
    }
    public Instructor(String name, String Id, boolean tenured, int yearsEmployed, String department) {
        super(name, Id);
        this.tenured = tenured;
        this.yearsEmployed = yearsEmployed;
        this.department = department;
    }
}
```

Subclasses can add instance variables and methods the base class does not have

Instructor.java

```
/**
 * Getters and setters
 */
public boolean getTenuredStatus() { return tenured;}
public int getYearsEmployed() { return yearsEmployed;}
public String getDepartment() { return department; }


public void setTenured(boolean tenured) { this.tenured = tenured; }
public void setYearsEmployed(int yearsEmployed) { this.yearsEmployed = yearsEmployed; }
public void setDepartment(String department) { this.department = department;}

/**
 * Return a String representation of an instructor
 * @return - string representing the instructor
 */
@Override
public String toString() {
    String s = super.toString() + "\n";
    s += "\tTenured: " + tenured + "\n";
    s += "\tYears Employed: " + yearsEmployed + "\n";
    s += "\tDepartment: " + department;
    return s;
}
```

Dynamic dispatch hunts up the inheritance chain to find methods

Instance variables

- *name*
- *Id*

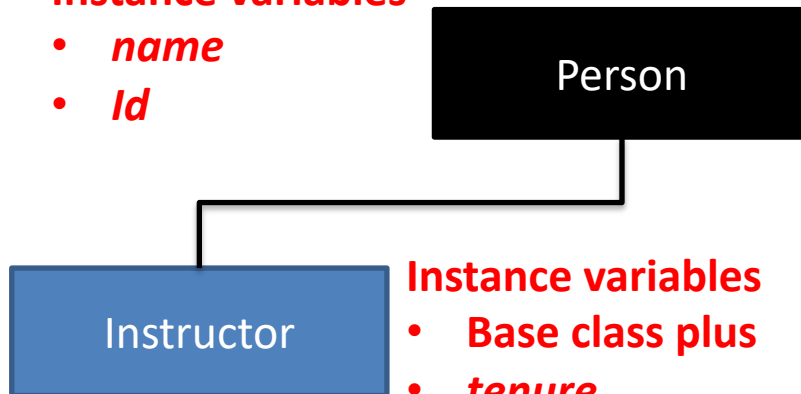

Instance variables

- Base class plus
- *tenure*
- *yearsEmployed*
- *department*

Methods


- *getters/setters* for *name* and *Id*
- *toString*

Methods

- Base class plus
- *getters/setters* for new instance variables
- Overriden *toString*


Dynamic dispatch hunts up the inheritance chain to find methods

DynamicDispatchExample.java

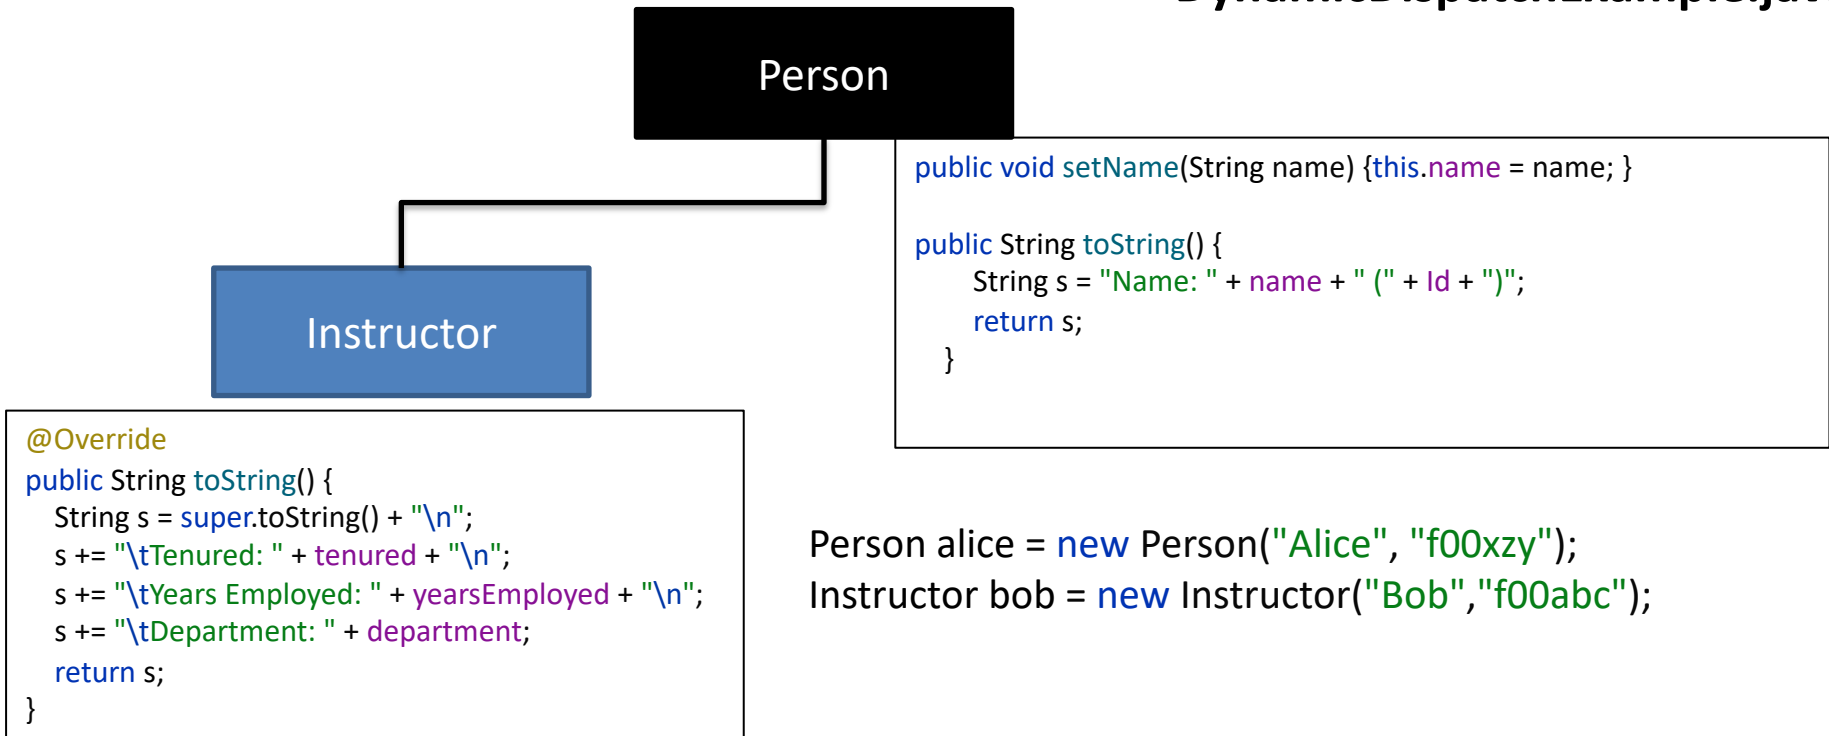

Dynamic dispatch starts at the class the object was declared, runs method if found

DynamicDispatchExample.java

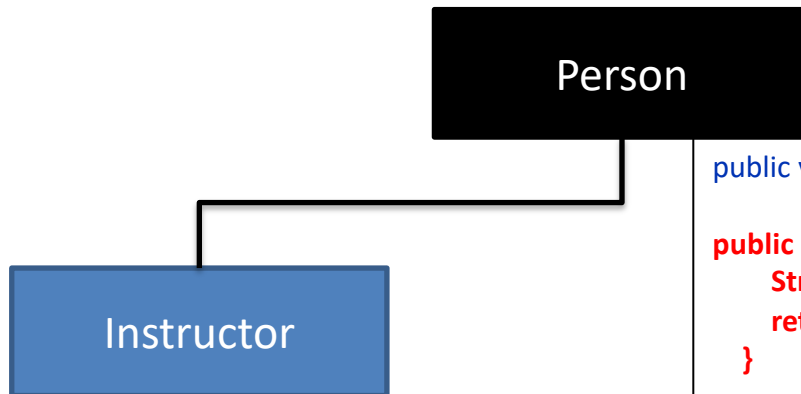

```
@Override
public String toString() {
    String s = super.toString() + "\n";
    s += "\tTenured: " + tenured + "\n";
    s += "\tYears Employed: " + yearsEmployed + "\n";
    s += "\tDepartment: " + department;
    return s;
}
```


```
public void setName(String name) {this.name = name; }

public String toString() {
    String s = "Name: " + name + " (" + Id + ")";
    return s;
}
```

```
Person alice = new Person("Alice", "f00xzy");
Instructor bob = new Instructor("Bob", "f00abc");
System.out.println(alice);
```

Dynamic dispatch hunts up the inheritance chain if method is not found

DynamicDispatchExample.java

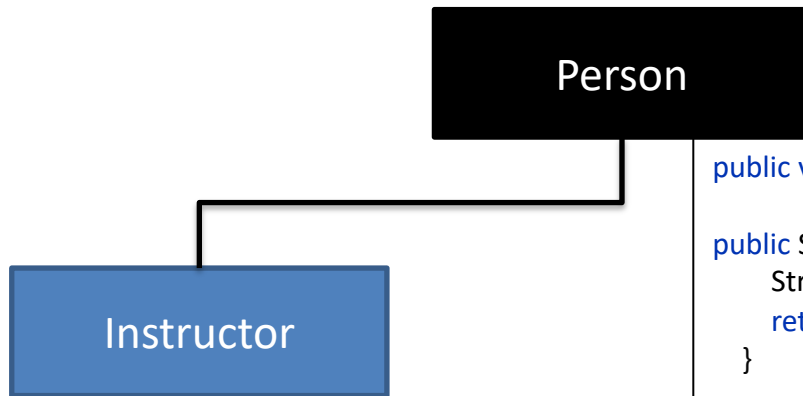

```
@Override
public String toString() {
    String s = super.toString() + "\n";
    s += "\tTenured: " + tenured + "\n";
    s += "\tYears Employed: " + yearsEmployed + "\n";
    s += "\tDepartment: " + department;
    return s;
}
```


```
public void setName(String name) {this.name = name; }

public String toString() {
    String s = "Name: " + name + " (" + Id + ")";
    return s;
}
```

```
Person alice = new Person("Alice", "f00xzy");
Instructor bob = new Instructor("Bob", "f00abc");
System.out.println(alice);
bob.setName("Bobby");
```

Dynamic dispatch hunts up the inheritance chain if method is not found

DynamicDispatchExample.java

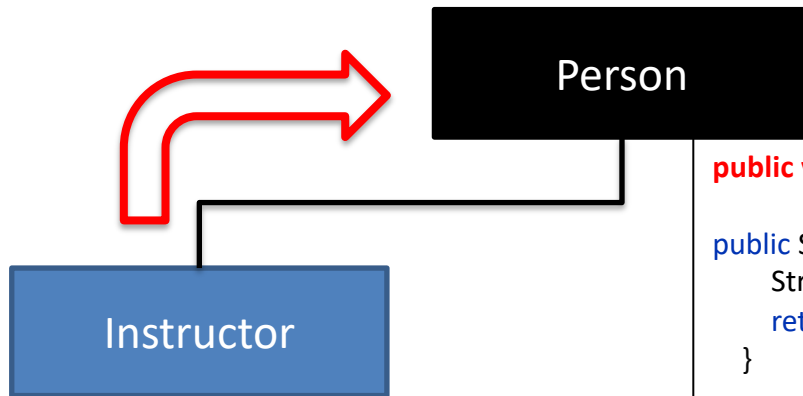

```
@Override
public String toString() {
    String s = super.toString() + "\n";
    s += "\tTenured: " + tenured + "\n";
    s += "\tYears Employed: " + yearsEmployed + "\n";
    s += "\tDepartment: " + department;
    return s;
}
```


```
public void setName(String name) {this.name = name; }

public String toString() {
    String s = "Name: " + name + " (" + Id + ")";
    return s;
}
```

```
Person alice = new Person("Alice", "f00xzy");
Instructor bob = new Instructor("Bob", "f00abc");
System.out.println(alice);
bob.setName("Bobby");
```

Run subclass code if a method is overridden

DynamicDispatchExample.java

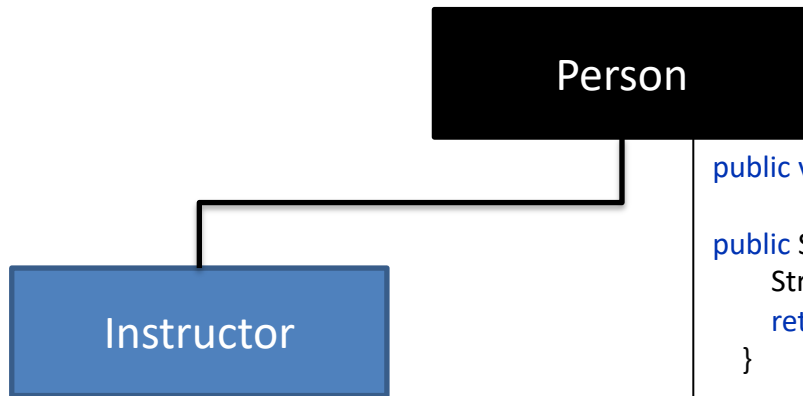

```
@Override
public String toString() {
    String s = super.toString() + "\n";
    s += "\tTenured: " + tenured + "\n";
    s += "\tYears Employed: " + yearsEmployed + "\n";
    s += "\tDepartment: " + department;
    return s;
}
```


```
public void setName(String name) {this.name = name; }

public String toString() {
    String s = "Name: " + name + " (" + Id + ")";
    return s;
}
```

```
Person alice = new Person("Alice", "f00xzy");
Instructor bob = new Instructor("Bob", "f00abc");
System.out.println(alice);
bob.setName("Bobby");
System.out.println(bob);
```


Dynamic dispatch starts at the class the object was declared, runs method if found


DynamicDispatchExample.java

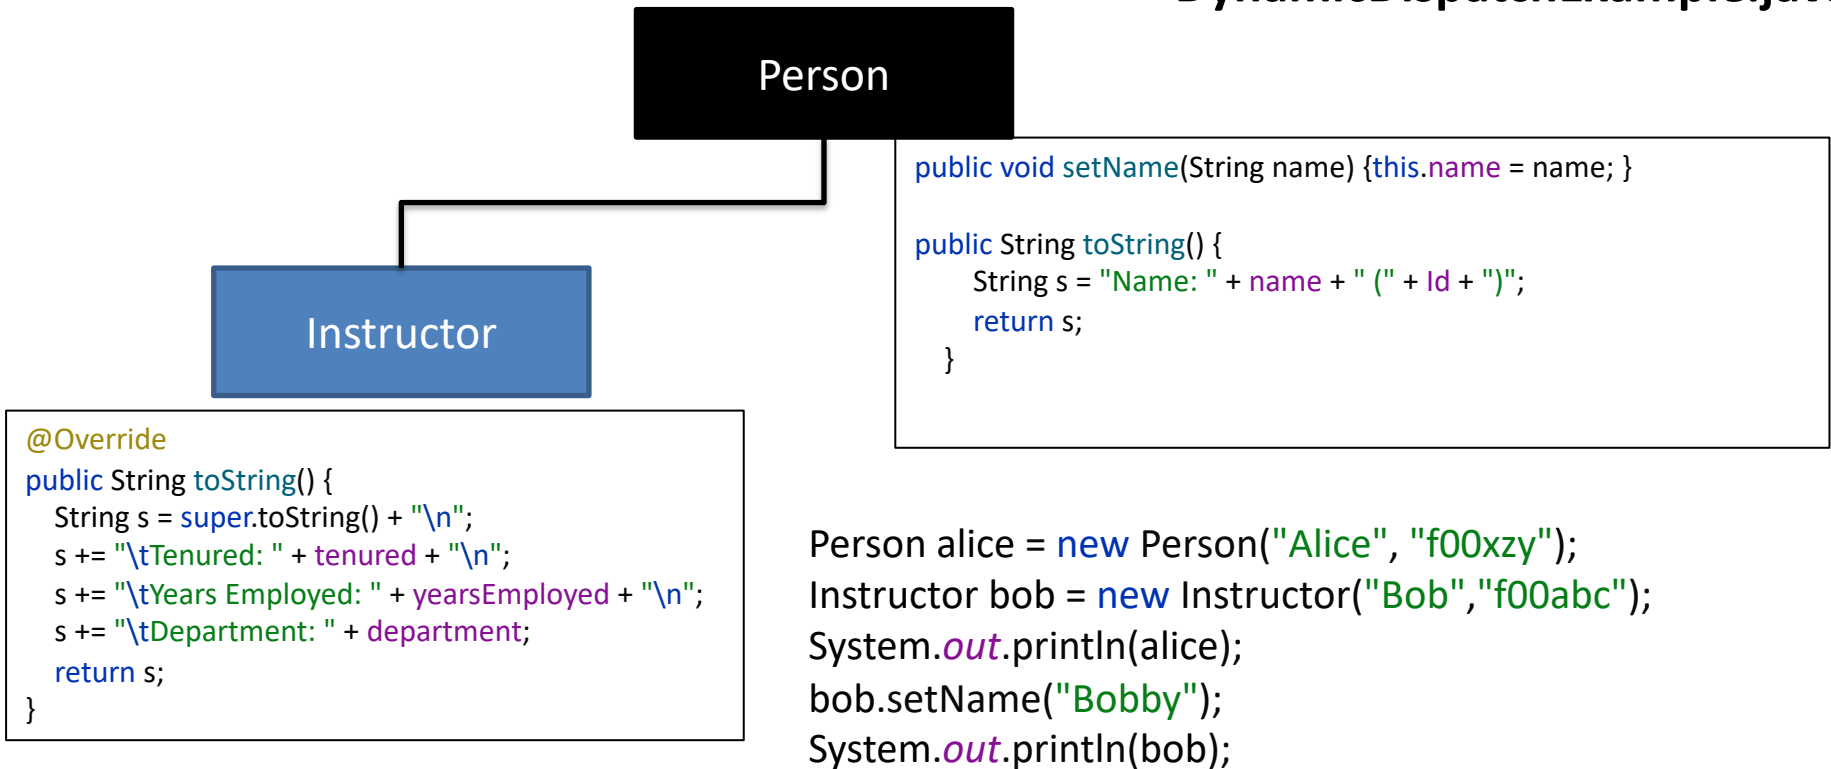

Output
Name: Alice (f00xzy)
Name: Bobby (f00abc)
Tenured: false
Years Employed: 0
Department: null

Multiple classes can inherit the same base class, each providing a specialty version

College application

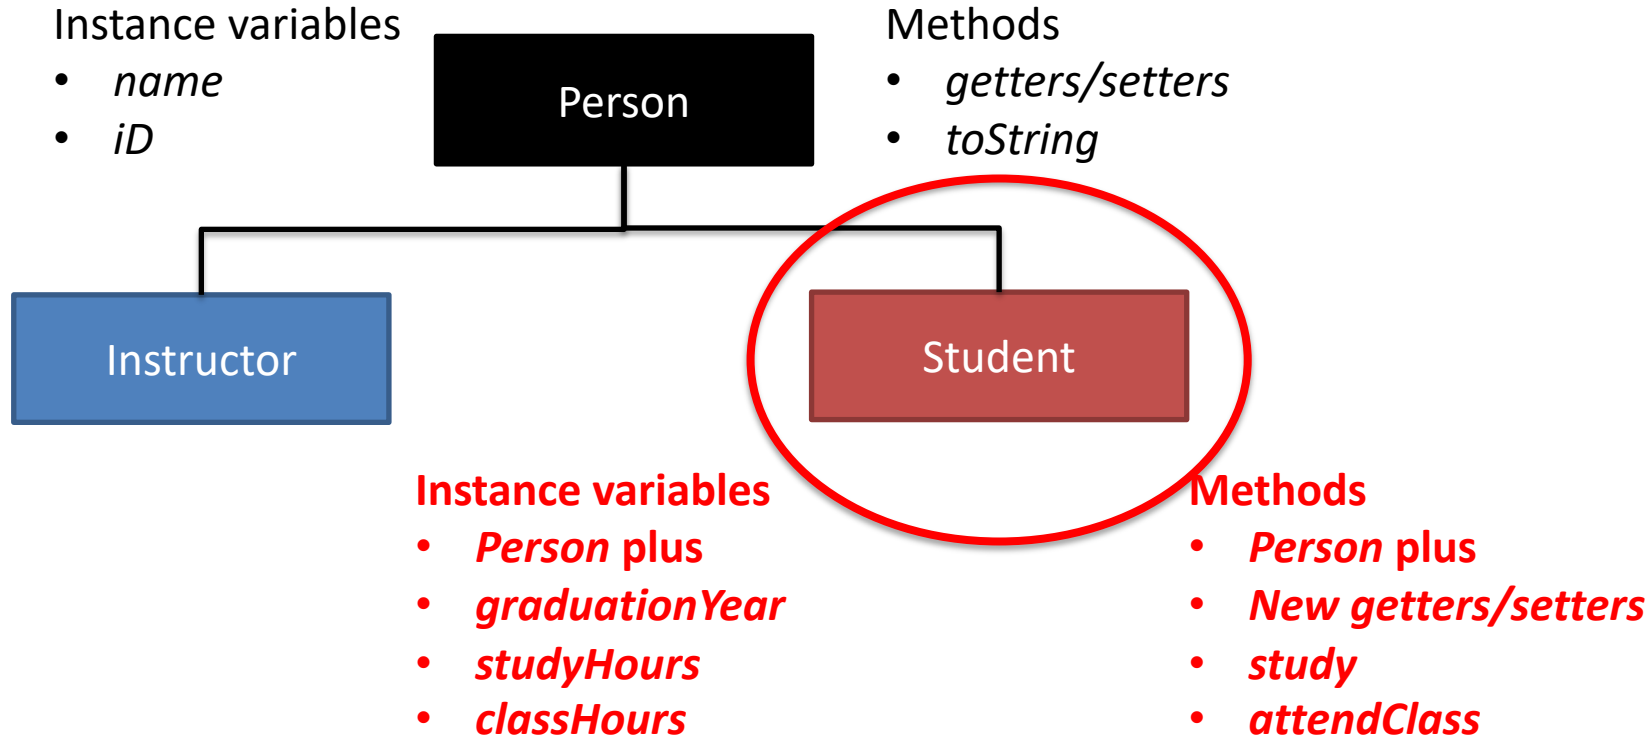

The Student class also inherits from the Person class, but behaves differently

Student.java

```
public class Student extends Person {
    protected Integer graduationYear;
    double studyHours;
    double classHours;


    public Student(String name, String Id) {
        super(name, Id);
        graduationYear = null;
        studyHours = 0;
        classHours = 0;
    }

    public double study(double hoursSpent) {
        System.out.println("Hi Mom! It's " + name + ". I'm studying!");
        studyHours += hoursSpent;
        return studyHours;
    }


    public double attendClass(double hoursSpent) {
        System.out.println("Hi Dad! It's " + name + ". I'm in class!");
        classHours += hoursSpent;
        return classHours;
    }

    @Override
    public String toString() {
        String s = super.toString() + "\n";
        s += "\tGraduation year: " + graduationYear + "\n";
        s += "\tHours studying: " + studyHours + "\n";
        s += "\tHours in class: " + classHours;
        return s;
    }
}
```


Classes can inherit from other inherited classes, forming a chain

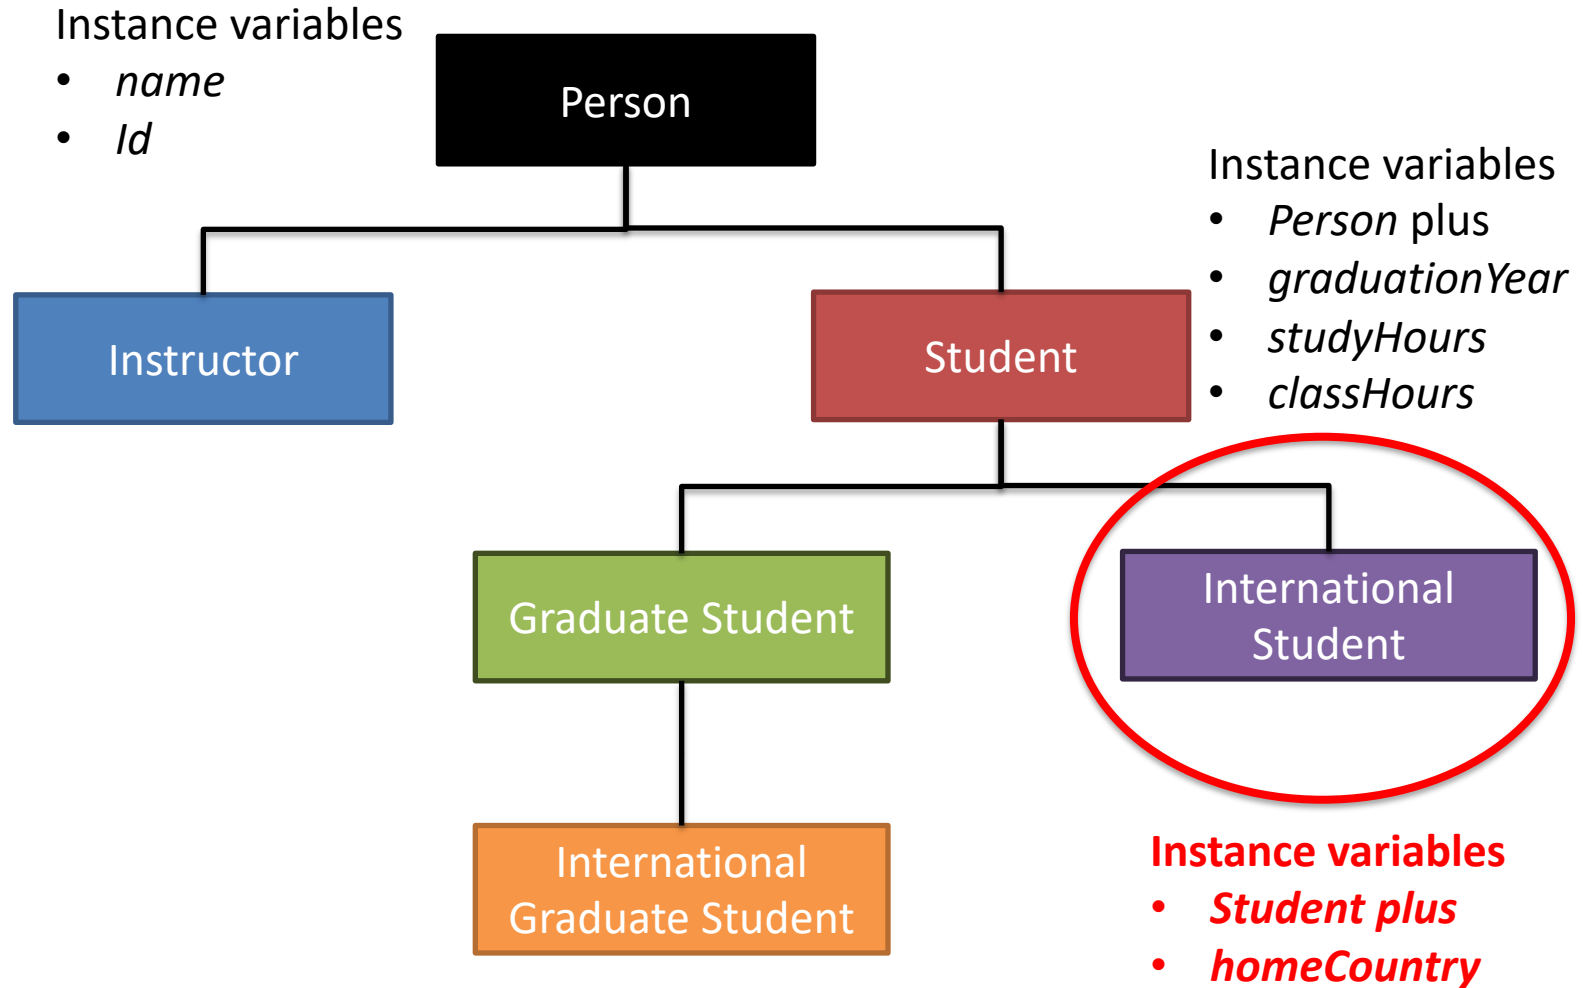


Classes can inherit from other inherited classes, forming a chain

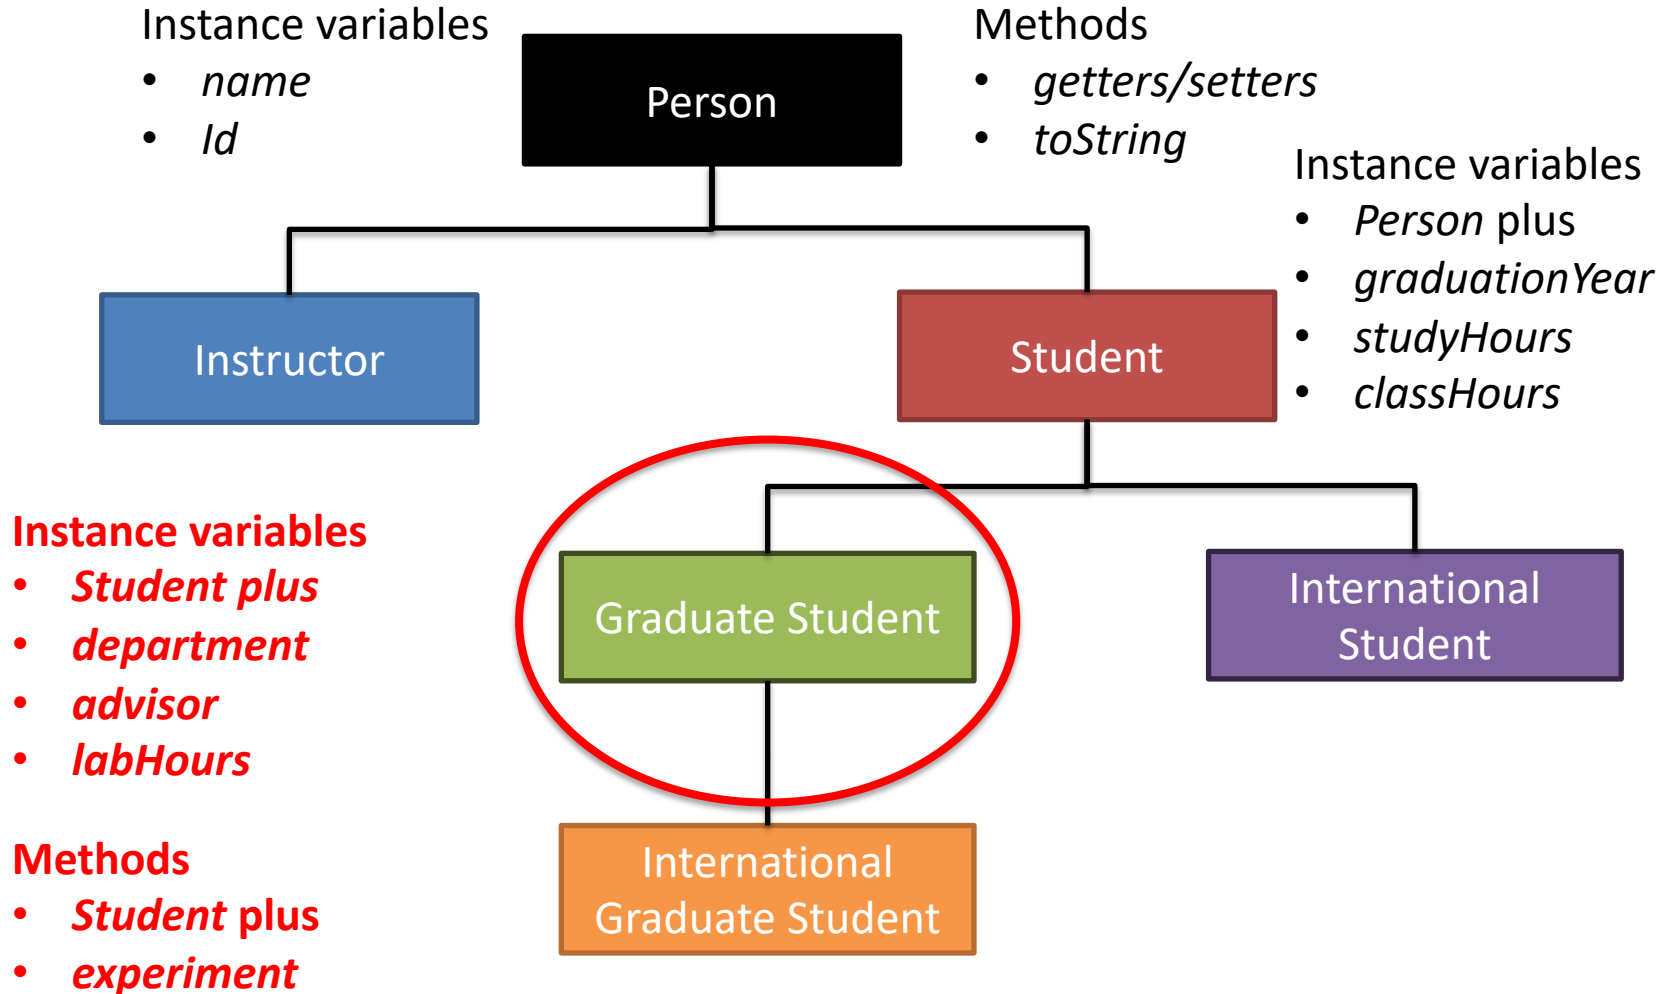

Classes can inherit from other inherited classes, forming a chain, but only one base class

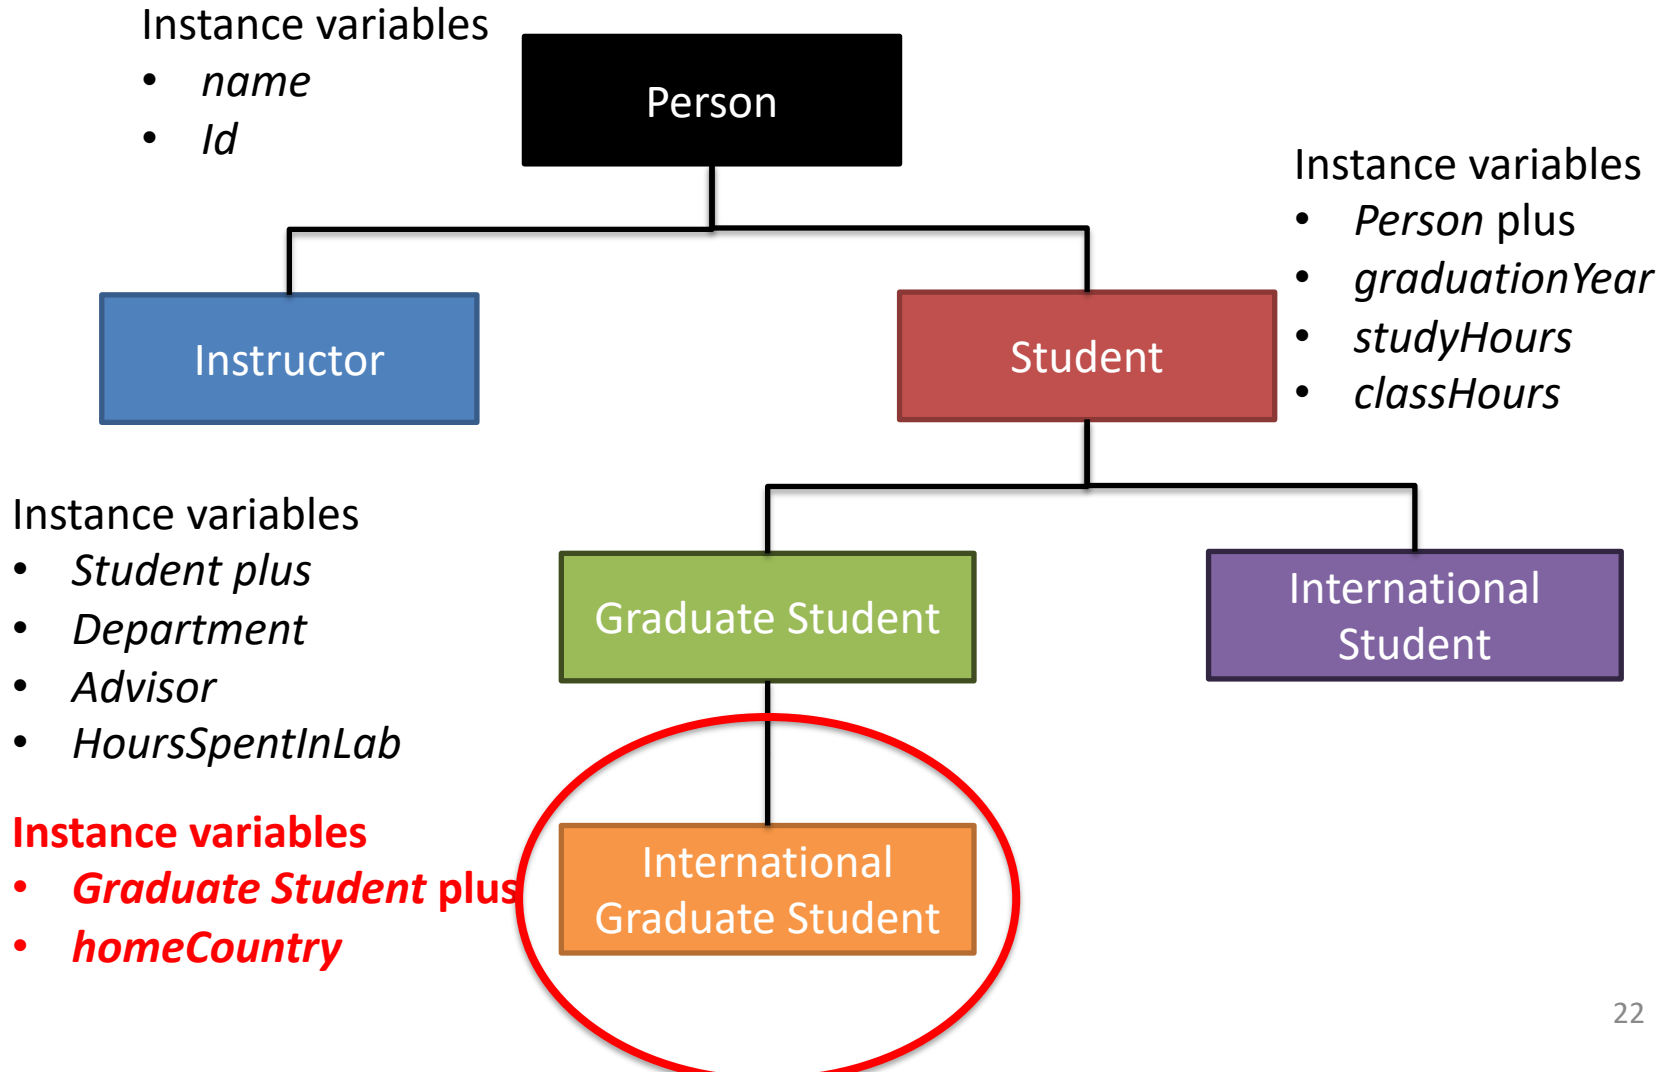

Agenda

1. Inheritance
-  2. Comparing objects
3. Small example application
4. Access modifiers

Use == when comparing primitives

```
public class CompareTest {  
    public static void main(String[] args) {  
        int a = 7;  
        int b = 5;  
        System.out.println("Check primitive variables");  
        System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
    }  
}
```

CompareTest.java

Output

Check primitive variables
a=7 b=5 same:**false**

Use == when comparing primitives

```
public class CompareTest {  
    public static void main(String[] args) {  
        int a = 7;  
        int b = 5;  
        System.out.println("Check primitive variables");  
        System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
        b = 7;  
        System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
    }  
}
```

CompareTest.java

Output

Check primitive variables

a=7 b=5 same:false

a=7 b=7 same:**true**

Using == when comparing objects checks to see if they reference the same address

```
public class CompareTest {  
    public static void main(String[] args) {  
        int a = 7;  
        int b = 5;  
        System.out.println("Check primitive variables");  
        System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
        b = 7;  
        System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
  
        System.out.println("Check object variables");  
        Person alice = new Person("Alice", "f00abc");  
        Person ally = alice;  
        System.out.println("alice == ally: " + (alice==ally));  
    }  
}
```

CompareTest.java

Output


Check primitive variables
a=7 b=5 same:false
a=7 b=7 same:true

Check object variables
alice equals ally: true

The right way to compare equality of objects is the *equals* method


```
/**  
 * Comare two Person objects and decide if they are the same.  
 * Use Id to decide  
 * @param other compare this person's Id  
 * @return true if Ids are the same, false otherwise  
 */  
public boolean equals(Person other) {
```

```
}
```

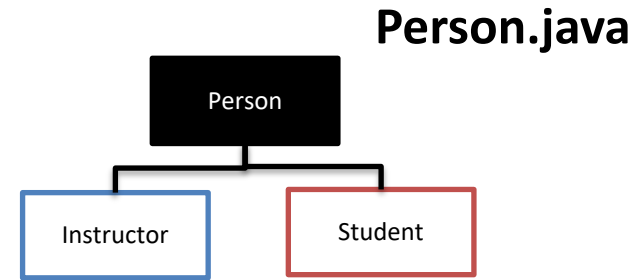


The right way to compare equality of objects is the *equals* method

```
/**
 * Compare two Person objects and decide if they are the same.
 * Use Id to decide
 * @param other compare this person's Id
 * @return true if Ids are the same, false otherwise
 */
public boolean equals(Person other) {
    if (Id.length() != other.Id.length()) {
        return false;
    }
    for (int i = 0; i < Id.length(); i++) {
        if (Id.charAt(i) != other.Id.charAt(i)) {
            return false;
        }
    }
    return true;
}
```

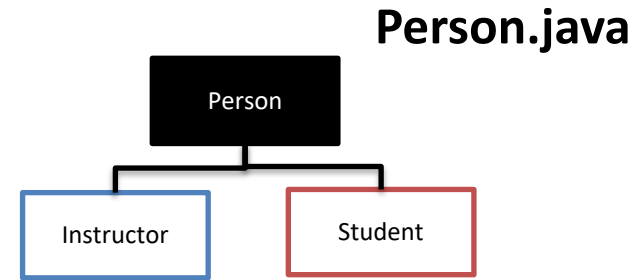

The right way to compare equality of objects is the *equals* method

```
/**
 * Compare two Person objects and decide if they are the same.
 * Use Id to decide
 * @param other compare this person's Id
 * @return true if Ids are the same, false otherwise
 */
public boolean equals(Person other) {
    // if (Id.length() != other.Id.length()) {
    //     return false;
    // }
    // for (int i = 0; i < Id.length(); i++) {
    //     if (Id.charAt(i) != other.Id.charAt(i)) {
    //         return false;
    //     }
    // }
    // return true;
    return Id.equals(other.Id);
}
```

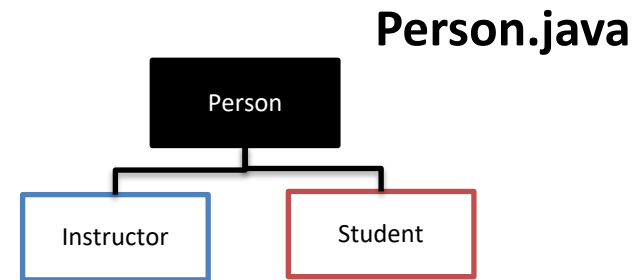

The right way to compare equality of objects is the *equals* method

```
public static void main(String[] args) {
    int a = 7;
    int b = 5;
    System.out.println("Check primitive variables");
    System.out.println("a=" + a + " b=" + b + " same:" + (a==b));
    b = 7;
    System.out.println("a=" + a + " b=" + b + " same:" + (a==b));

    System.out.println("\nCheck object variables");
    Person alice = new Person("Alice", "f00abc");
    Person ally = alice;
    System.out.println("alice == ally: " + (alice==ally));
    System.out.println("alice equals ally: " + alice.equals(ally));
}
```

CompareTest.java

Output

```
Check primitive variables
a=7 b=5 same:false
a=7 b=7 same:true
```

```
Check object variables
alice == ally: true
alice equals ally: true
```

The right way to compare equality of objects is the *equals* method

```
public static void main(String[] args) {  
    int a = 7;  
    int b = 5;  
    System.out.println("Check primitive variables");  
    System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
    b = 7;  
    System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
  
    System.out.println("\nCheck object variables");  
    Person alice = new Person("Alice", "f00abc");  
    Person ally = alice;  
    System.out.println("alice == ally: " + (alice==ally));  
    System.out.println("alice equals ally: " + alice.equals(ally));  
    ally = new Person("Ally", "f00xyz");  
    System.out.println("alice == ally: " + (alice==ally));  
    System.out.println("alice equals ally: " + alice.equals(ally));  
}
```

CompareTest.java

Output

```
Check primitive variables  
a=7 b=5 same:false  
a=7 b=7 same:true
```

```
Check object variables  
alice == ally: true  
alice equals ally: true  
alice == ally: false  
alice equals ally: false
```

The right way to compare equality of objects is the *equals* method

```
public static void main(String[] args) {  
    int a = 7;  
    int b = 5;  
    System.out.println("Check primitive variables");  
    System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
    b = 7;  
    System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
  
    System.out.println("\nCheck object variables");  
    Person alice = new Person("Alice", "f00abc");  
    Person ally = alice;  
    System.out.println("alice == ally: " + (alice==ally));  
    System.out.println("alice equals ally: " + alice.equals(ally));  
    ally = new Person("Ally", "f00xyz");  
    System.out.println("alice == ally: " + (alice==ally));  
    System.out.println("alice equals ally: " + alice.equals(ally));  
    ally.setId("f00abc");  
    System.out.println("alice == ally: " + (alice==ally));  
    System.out.println("alice equals ally: " + alice.equals(ally));  
}
```

CompareTest.java

Output

```
Check primitive variables  
a=7 b=5 same:false  
a=7 b=7 same:true
```

```
Check object variables  
alice == ally: true  
alice equals ally: true  
alice == ally: false  
alice equals ally: false  
alice == ally: false  
alice equals ally: true
```


instanceof lets you check an object's type

```
public static void main(String[] args) {
```

<snip>

```
System.out.println("alice == ally: " + (alice==ally));  
System.out.println("alice equals ally: " + alice.equals(ally));
```

//instanceof tests

```
Person bob = new Instructor("Bob", "f00000");  
Person carol = new Student("Carol", "f11111");
```

CompareTest.java

Output

Check primitive variables
a=7 b=5 same:false
a=7 b=7 same:true

Check object variables
alice == ally: true
alice equals ally: true
alice == ally: false
alice equals ally: false
alice == ally: false
alice equals ally: true

instanceof lets you check an object's type

```
public static void main(String[] args) {
```

```
<snip>
```

```
System.out.println("alice == ally: " + (alice==ally));  
System.out.println("alice equals ally: " + alice.equals(ally));
```

```
//instanceof tests
```

```
Person bob = new Instructor("Bob", "f00000");
```

```
Person carol = new Student("Carol", "f11111");
```

```
if (bob instanceof Instructor) { 
```

```
    System.out.println("Bob is an instructor");
```

```
}
```

```
if (carol instanceof Instructor) {
```

```
    System.out.println("Carol is an instructor");
```

```
}
```

```
}
```

CompareTest.java

Output

Check primitive variables

a=7 b=5 same:false

a=7 b=7 same:true

Check object variables

alice == ally: true

alice equals ally: true

alice == ally: false

alice equals ally: false

alice == ally: false

alice equals ally: true

Bob is an instructor

instanceof lets you check an object's type

```
public static void main(String[] args) {
```

```
<snip>
```

```
System.out.println("alice == ally: " + (alice==ally));  
System.out.println("alice equals ally: " + alice.equals(ally));
```

```
//instanceof tests
```

```
Person bob = new Instructor("Bob", "f00000");
```

```
Person carol = new Student("Carol", "f11111");
```

```
if (bob instanceof Instructor) {
```

```
    System.out.println("Bob is an instructor");
```

```
}
```

```
if (carol instanceof Instructor) {
```

```
    System.out.println("Carol is an instructor");
```

```
}
```

```
}
```

CompareTest.java

Output

Check primitive variables

a=7 b=5 same:false

a=7 b=7 same:true

Check object variables

alice == ally: true

alice equals ally: true

alice == ally: false

alice equals ally: false


alice == ally: false

alice equals ally: true


Bob is an instructor



Our classes inherit from Java's Object class behind the scenes

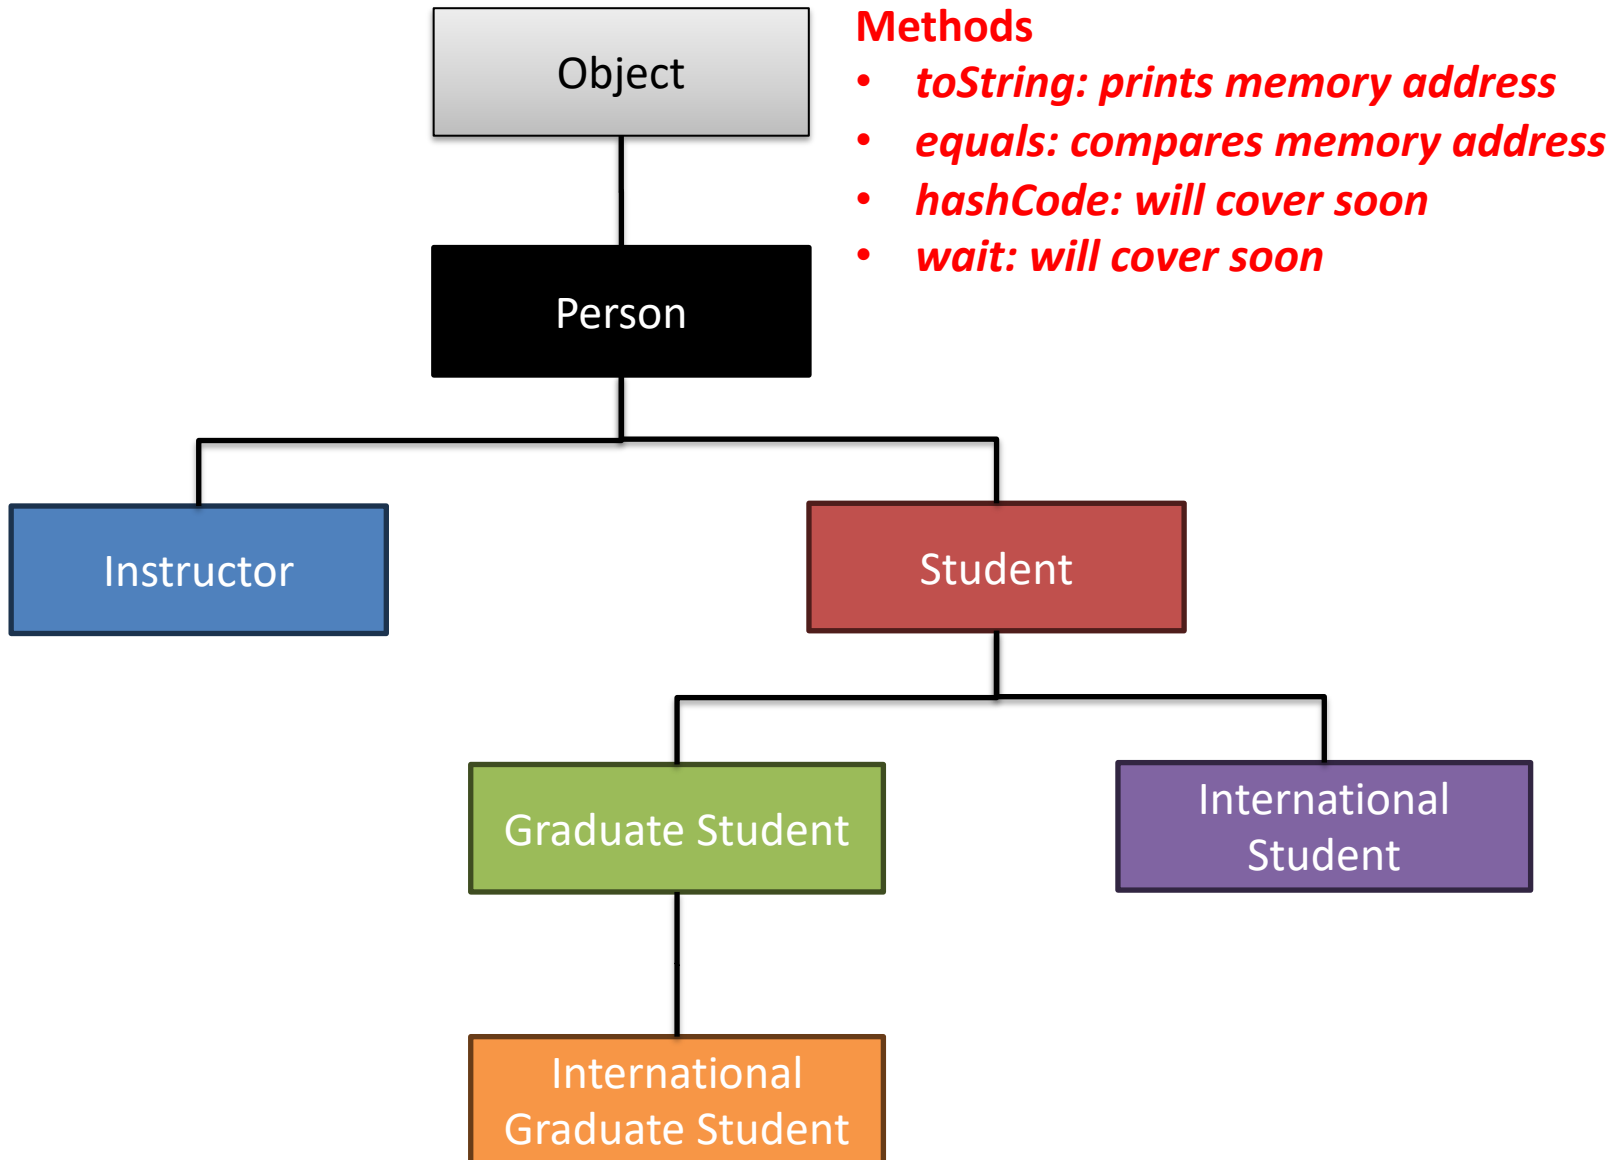

Agenda

1. Inheritance
2. Comparing objects
-  3. Small example application
4. Access modifiers

An array that holds Person objects can also hold objects of a subclass type

CollegeApp.java

```
public class CollegeApp {  
    public static void main(String[] args) {  
        //define some people  
        int numberOfPeople = 5;  
        Person[] people = new Person[numberOfPeople];  
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");  
        aql.setDepartment("Computer Science");  
        people[0] = aql;  
    }  
}
```

An array that holds Person objects can also hold objects of a subclass type

CollegeApp.java

```
public class CollegeApp {  
    public static void main(String[] args) {  
        //define some people  
        int numberOfPeople = 5;  
        Person[] people = new Person[numberOfPeople];  
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");  
        aql.setDepartment("Computer Science");  
        people[0] = aql;  
        people[1] = new Student("Alice", "f00xyz");  
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science", "Tim Pierson");  
    }  
}
```

An array that holds Person objects can also hold objects of a subclass type

CollegeApp.java

```
public class CollegeApp {  
    public static void main(String[] args) {  
        //define some people  
        int numberOfPeople = 5;  
        Person[] people = new Person[numberOfPeople];  
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");  
        aql.setDepartment("Computer Science");  
        people[0] = aql;  
        people[1] = new Student("Alice", "f00xyz");  
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science", "Tim Pierson");  
        ((Student)people[2]).graduationYear = 2028;  
    }  
}
```


An array that holds Person objects can also hold objects of a subclass type

CollegeApp.java

```
public class CollegeApp {  
    public static void main(String[] args) {  
        //define some people  
        int numberOfPeople = 5;  
        Person[] people = new Person[numberOfPeople];  
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");  
        aql.setDepartment("Computer Science");  
        people[0] = aql;  
        people[1] = new Student("Alice", "f00xyz");  
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science", "Tim Pierson");  
        ((Student)people[2]).graduationYear = 2028;  
        people[3] = new InternationalStudent("Charlie", "f00123", "Germany");  
        people[4] = new InternationalGraduateStudent("Denise", "f00987");  
    }  
}
```

Now array *people* holds:

- **An Instructor**
- **A Student**
- **A GraduateStudent**
- **An InternationalStudent**
- **An InternationalGraduateStudent**

That is ok because they are all *Persons*

An array that holds Person objects can also hold objects of a subclass type

CollegeApp.java

```
public class CollegeApp {
    public static void main(String[] args) {
        //define some people
        int numberOfPeople = 5;
        Person[] people = new Person[numberOfPeople];
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");
        aql.setDepartment("Computer Science");
        people[0] = aql;
        people[1] = new Student("Alice", "f00xyz");
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science", "Tim Pierson");
        ((Student)people[2]).graduationYear = 2028;
        people[3] = new InternationalStudent("Charlie", "f00123", "Germany");
        people[4] = new InternationalGraduateStudent("Denise", "f00987");
        ((InternationalGraduateStudent)people[4]).setDepartment("Computer Science");
        ((InternationalGraduateStudent)people[4]).setAdvisorName("Alan Turing");
        ((InternationalGraduateStudent)people[4]).setHomeCountry("Spain");
    }
}
```

An array that holds Person objects can also hold objects of a subclass type

CollegeApp.java


```
public class CollegeApp {
    public static void main(String[] args) {
        //define some people
        int numberOfPeople = 5;
        Person[] people = new Person[numberOfPeople];
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");
        aql.setDepartment("Computer Science");
        people[0] = aql;
        people[1] = new Student("Alice", "f00xyz");
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science", "Tim Pierson");
        ((Student)people[2]).graduationYear = 2028;
        people[3] = new InternationalStudent("Charlie", "f00123", "Germany");
        people[4] = new InternationalGraduateStudent("Denise", "f00987");
        ((InternationalGraduateStudent)people[4]).setDepartment("Computer Science");
        ((InternationalGraduateStudent)people[4]).setAdvisorName("Alan Turing");
        ((InternationalGraduateStudent)people[4]).setHomeCountry("Spain");
    }
}
```

 Could we cast to Graduate student instead for Denise?

An array that holds Person objects can also hold objects of a subclass type

```
public class CollegeApp {  
    public static void main(String[] args) {  
        //define some people  
        int numberOfPeople = 5;  
        Person[] people = new Person[numberOfPeople];  
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");  
        aql.setDepartment("Computer Science");  
        people[0] = aql;  
        people[1] = new Student("Alice", "f00xyz");  
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science");  
        ((Student)people[2]).graduationYear = 2028;  
        people[3] = new InternationalStudent("Charlie", "f00123", "Germany");  
        people[4] = new InternationalGraduateStudent("Denise", "f00987");  
        ((InternationalGraduateStudent)people[4]).setDepartment("Computer Science");  
        ((InternationalGraduateStudent)people[4]).setAdvisorName("Alan Turing");  
        ((InternationalGraduateStudent)people[4]).setHomeCountry("Spain");  
    }  
}
```

CollegeApp.java

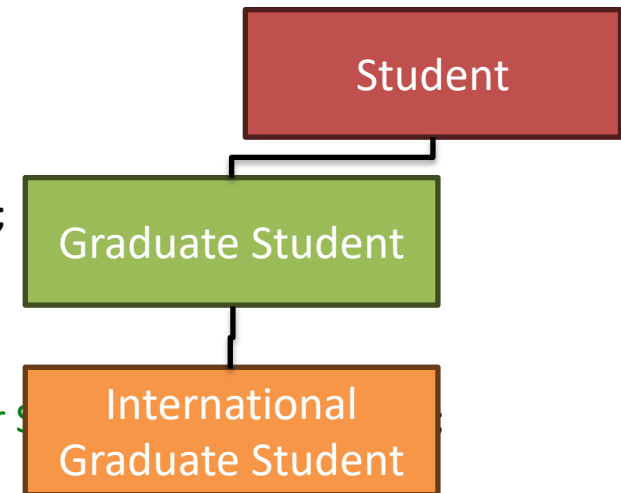

←

**Could we cast to Graduate student instead for Denise?
Yes! For setDepartment and setAdvisorName,
but No! for setHomeCountry**

An array that holds Person objects can also hold objects of a subclass type

CollegeApp.java

```
public class CollegeApp {
    public static void main(String[] args) {
        //define some people
        int numberOfPeople = 5;
        Person[] people = new Person[numberOfPeople];
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");
        aql.setDepartment("Computer Science");
        people[0] = aql;
        people[1] = new Student("Alice", "f00xyz");
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science", "Tim Pierson");
        ((Student)people[2]).graduationYear = 2028;
        people[3] = new InternationalStudent("Charlie", "f00123", "Germany");
        people[4] = new InternationalGraduateStudent("Denise", "f00987");
        ((InternationalGraduateStudent)people[4]).setDepartment("Computer Science");
        ((InternationalGraduateStudent)people[4]).setAdvisorName("Alan Turing");
        ((InternationalGraduateStudent)people[4]).setHomeCountry("Spain");

        //print all people
        for (Person p: people) {
            System.out.println(p + "\n");
        }
    }
}
```

An array that holds Person objects can also hold objects of a subclass type

```
public class CollegeApp {
    public static void main(String[] args) {
        //define some people
        int numberOfPeople = 5;
        Person[] people = new Person[numberOfPeople];
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");
        aql.setDepartment("Computer Science");
        people[0] = aql;
        people[1] = new Student("Alice", "f00xyz");
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science"
            ((Student)people[2]).graduationYear = 2028;
        people[3] = new InternationalStudent("Charlie", "f00123", "Germany");
        people[4] = new InternationalGraduateStudent("Denise", "f00987");
        ((InternationalGraduateStudent)people[4]).setDepartment("Computer Science");
        ((InternationalGraduateStudent)people[4]).setAdvisorName("Alan Turing");
        ((InternationalGraduateStudent)people[4]).setHomeCountry("Spain");


        //print all people
        for (Person p: people) {
            System.out.println(p + "\n");
        }
    }
}
```

CollegeApp.java

```
Name: Alberto Quattrini Li (f00zzz)
    Tenured: false
    Years Employed: 0
    Department: Computer Science
Name: Alice (f00xyz)
    Graduation year: null
    Hours studying: 0.0
    Hours in class: 0.0
Name: Bob (f00abc)
    Graduation year: 2028
    Hours studying: 0.0
    Hours in class: 0.0
    Hours in the lab: 0.0
    Department: Computer Science
    Advisor: Tim Pierson
Name: Charlie (f00123)
    Graduation year: null
    Hours studying: 0.0
    Hours in class: 0.0
    Home country: Germany
Name: Denise (f00987)
    Graduation year: null
    Hours studying: 0.0
    Hours in class: 0.0
    Hours in the lab: 0.0
    Department: Computer Science
    Advisor: Alan Turing
    Home country: Spain
```

So in general: you can declare base class and instantiate as subclass


```
Person bob = new Instructor("Bob", "f00000");  
Person carol = new Student("Carol", "f11111");
```

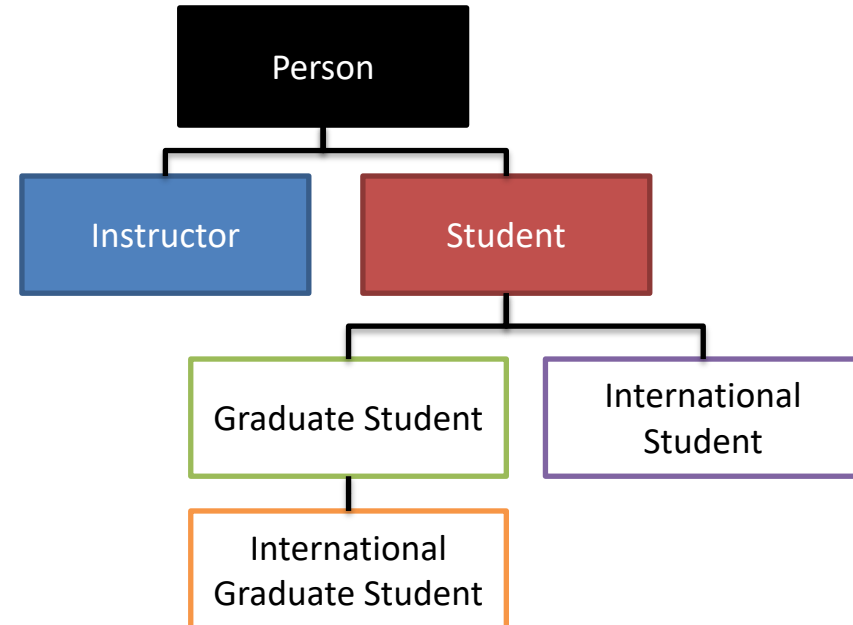

You can cast to the instantiated type

```
Person bob = new Instructor("Bob", "f00000");  
Person carol = new Student("Carol", "f11111");
```

```
((Instructor) bob).tenured = true;  
((Student) carol).graduationYear = 2027;
```

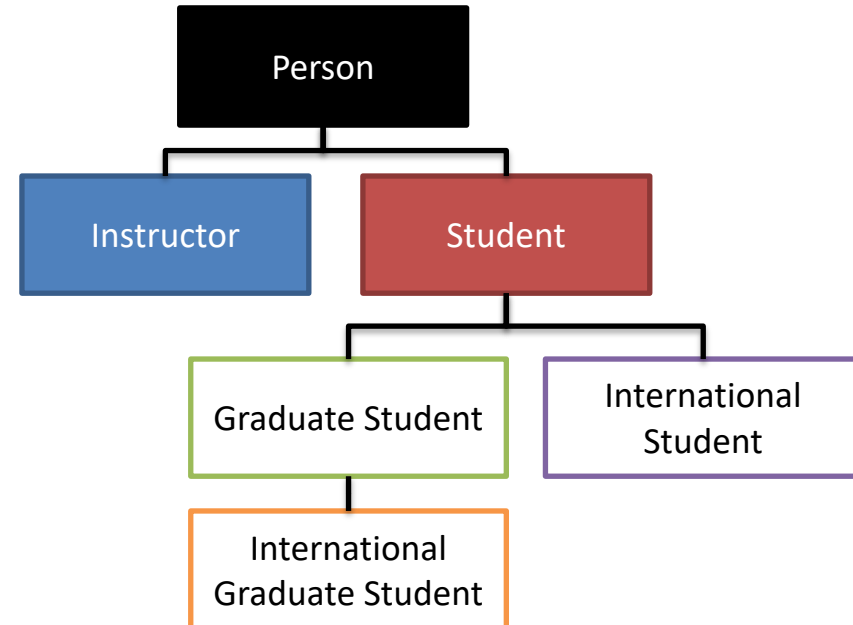


Cannot cast to a type outside the inheritance chain

```
Person bob = new Instructor("Bob", "f00000");  
Person carol = new Student("Carol", "f11111");
```

```
((Instructor) bob).tenured = true;  
((Student) carol).graduationYear = 2027;
```

```
((Student) bob).graduationYear = 2028;
```

Output:

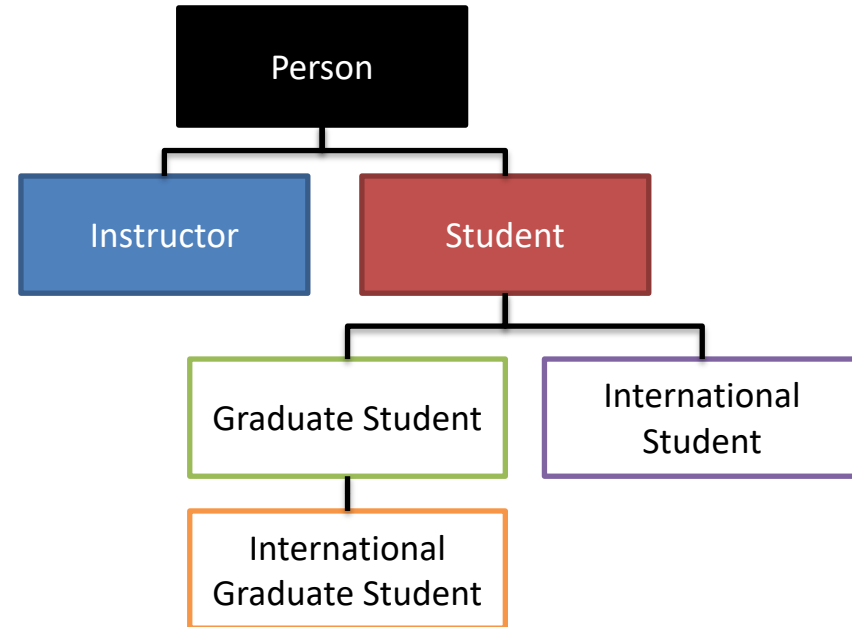

Cannot cast to a type outside the inheritance chain


```
Person bob = new Instructor("Bob", "f00000");  
Person carol = new Student("Carol", "f11111");
```

```
((Instructor) bob).tenured = true;  
((Student) carol).graduationYear = 2027;
```

```
((Student) bob).graduationYear = 2028;
```

Output:

Exception: class Instructor cannot be cast to class Student

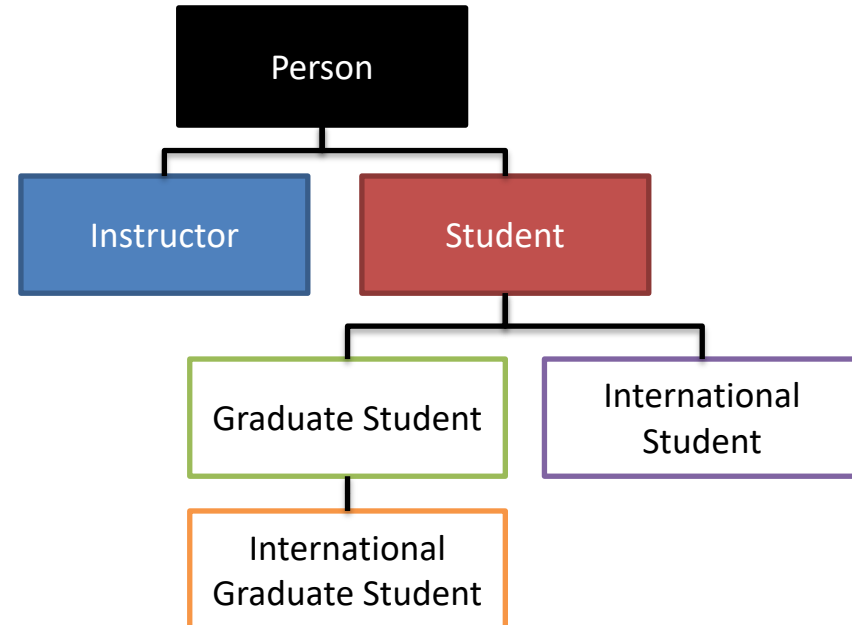


Cannot cast down the inheritance chain

```
Person bob = new Instructor("Bob", "f00000");  
Person carol = new Student("Carol", "f11111");
```

```
((Instructor) bob).tenured = true;  
((Student) carol).graduationYear = 2027;
```

```
((GraduateStudent) carol).graduationYear = 2028;
```

Output:

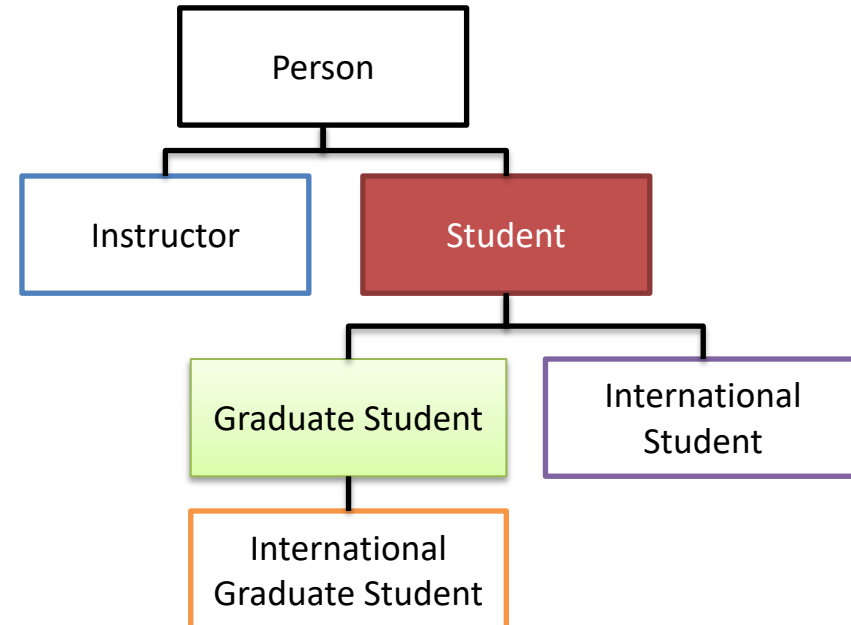

Cannot cast down the inheritance chain


```
Person bob = new Instructor("Bob", "f00000");  
Person carol = new Student("Carol", "f11111");
```

```
((Instructor) bob).tenured = true;  
((Student) carol).graduationYear = 2027;
```

```
((GraduateStudent) carol).graduationYear = 2028;
```

Output:

class Student cannot be cast to class GraduateStudent

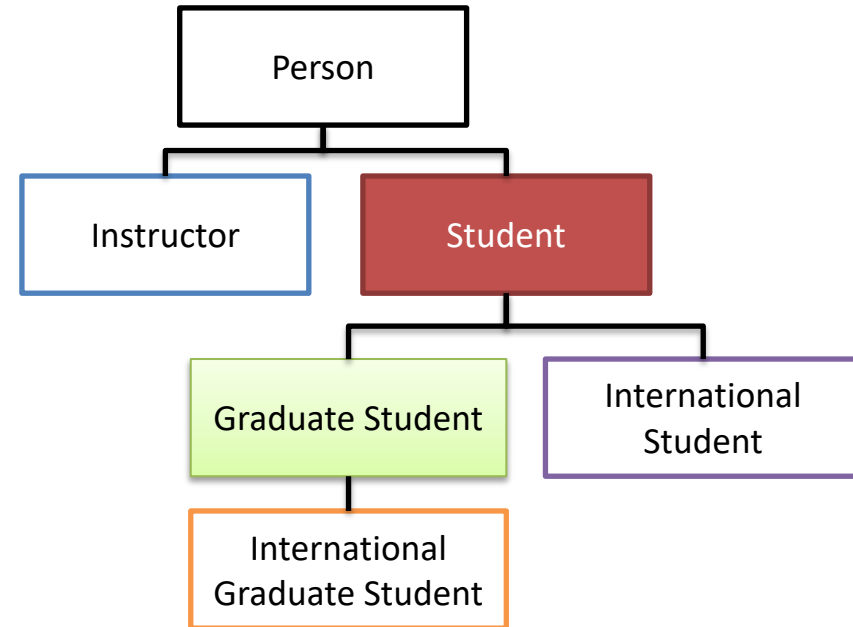

Can cast up the inheritance chain


```
Person bob = new Instructor("Bob", "f00000");
```

```
Person carol = new InternationalGraduateStudent("Carol", "f11111");
```


```
((Instructor) bob).tenured = true;
```

```
((Student) carol).graduationYear = 2027;
```

```
((GraduateStudent) carol).graduationYear = 2028;
```

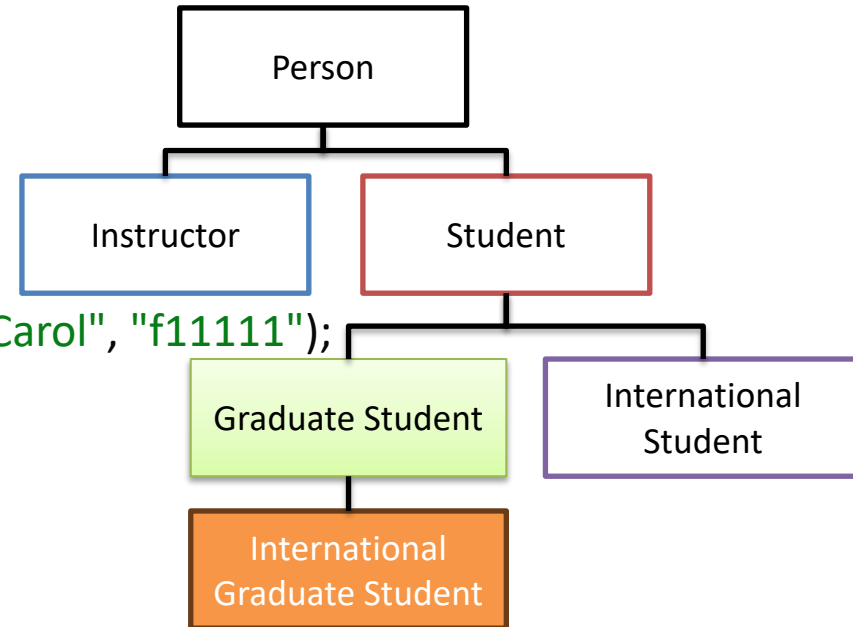


Agenda

1. Inheritance
2. Comparing objects
3. Small example application
-  4. Access modifiers

Java allows us to break up major portions of code into Projects, Packages and Classes


Example of master project for a company

Main Project

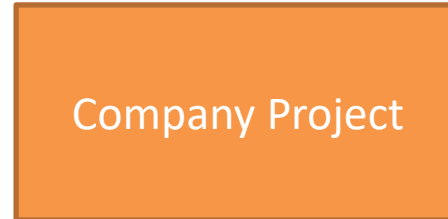


Java allows us to break up major portions of code into Projects, Packages and Classes

Example of master project for a company

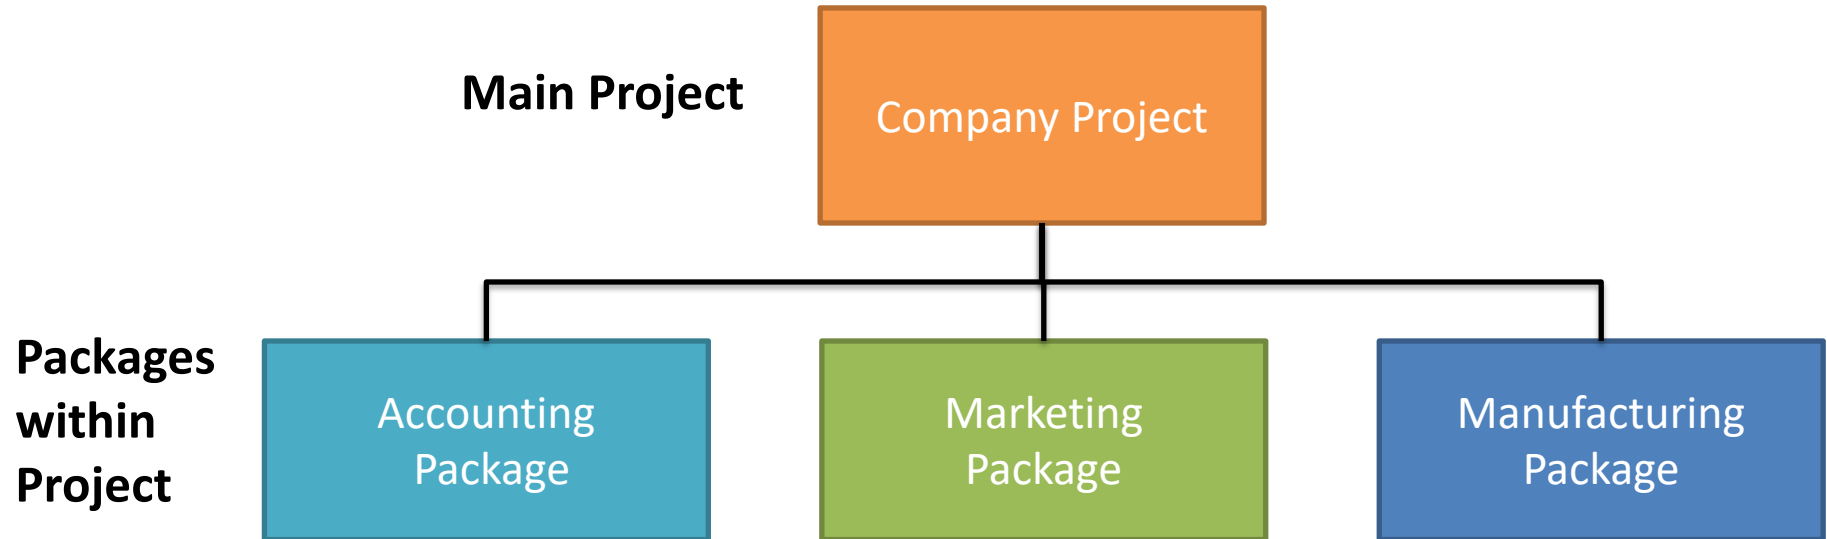


Java allows us to break up major portions of code into Projects, Packages and Classes

Example of master project for a company

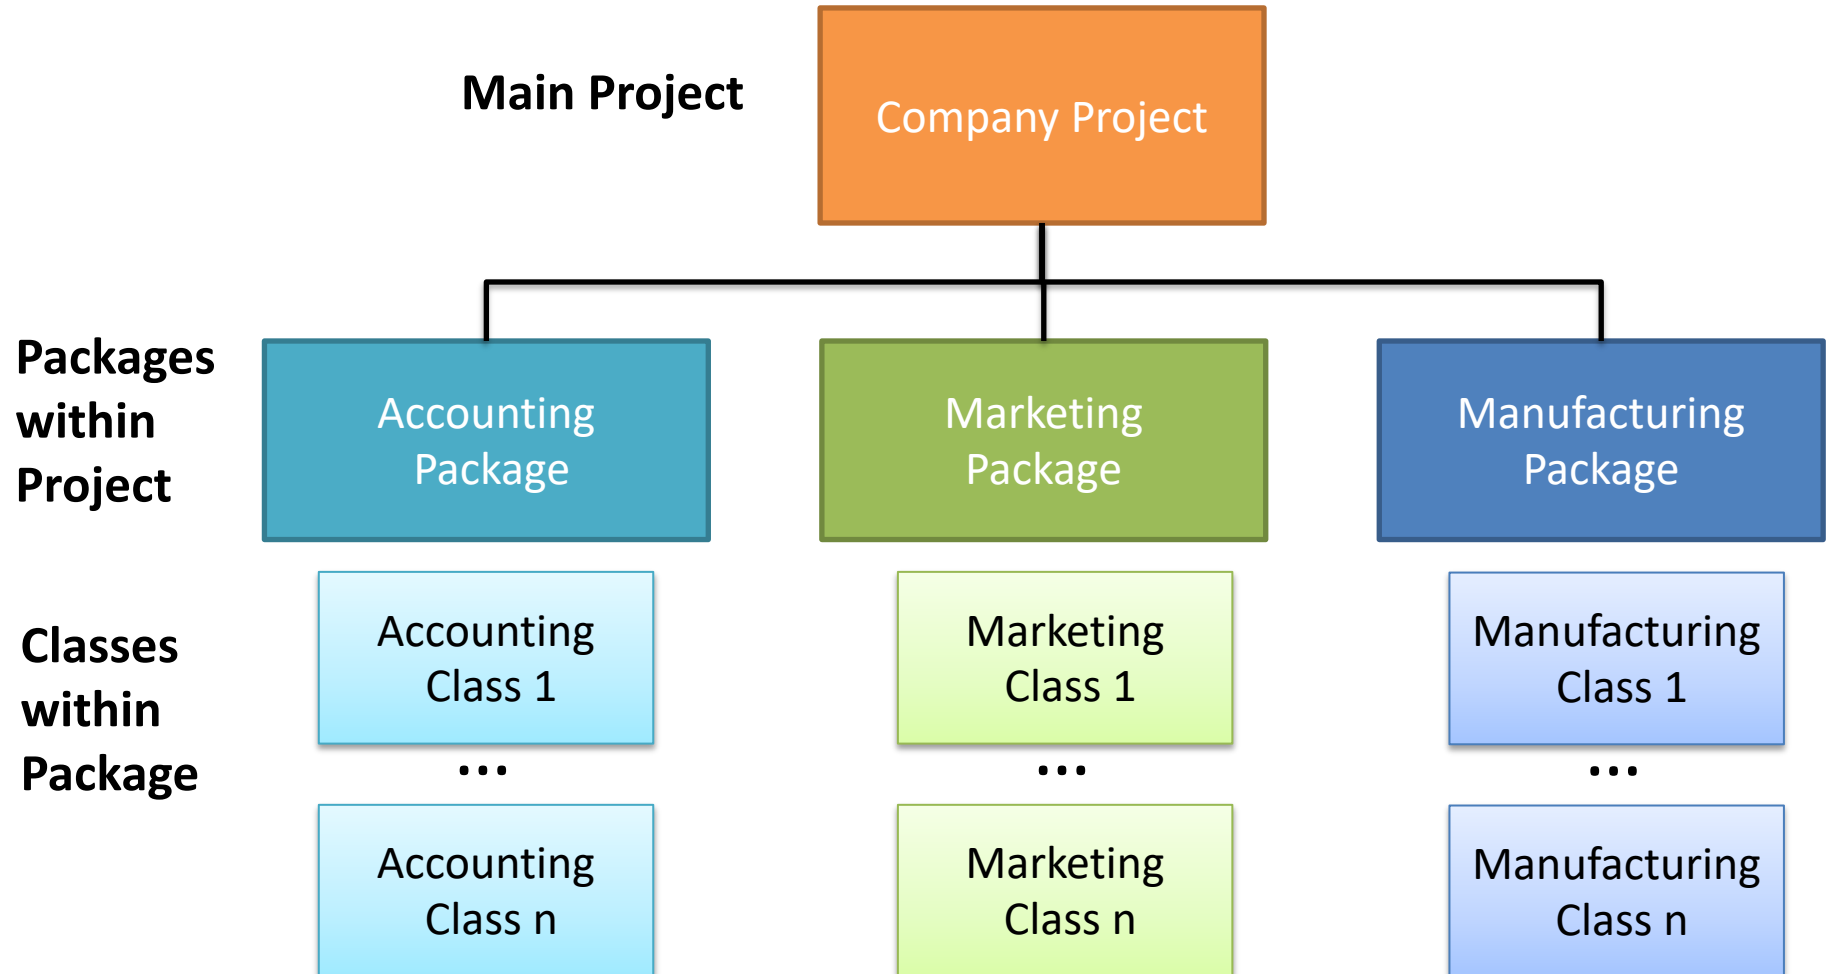

Visibility depends on modifier applied


Example: Visibility of Alpha class

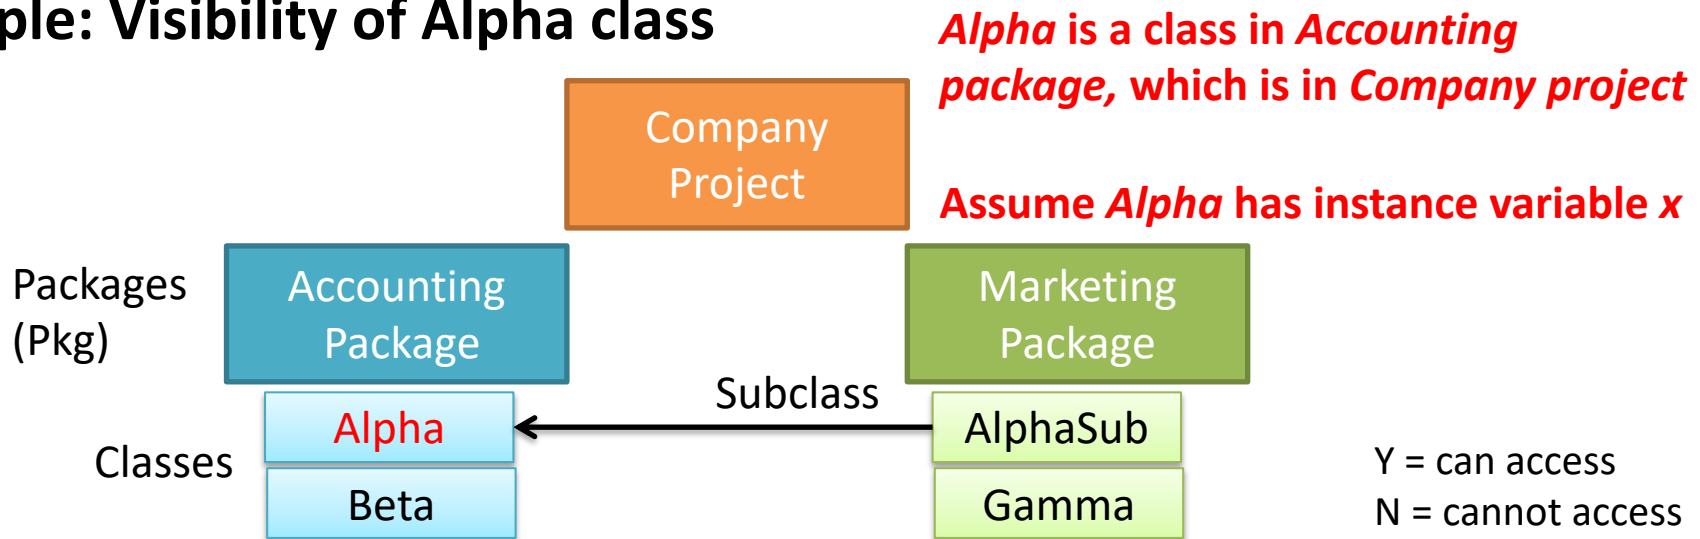

If Alpha.x is:	Alpha.x can be accessed by:	Accounting Pkg		Marketing Pkg	
		Alpha	Beta	AlphaSub	Gamma
public	Any class	Y	Y	Y	Y
protected	Pkg + Subclass	Y	Y	Y	N
No modifier	Pkg - Subclass	Y	Y	N	N
private	This class only	Y	N	N	N

Visibility depends on modifier applied


Example: Visibility of Alpha class

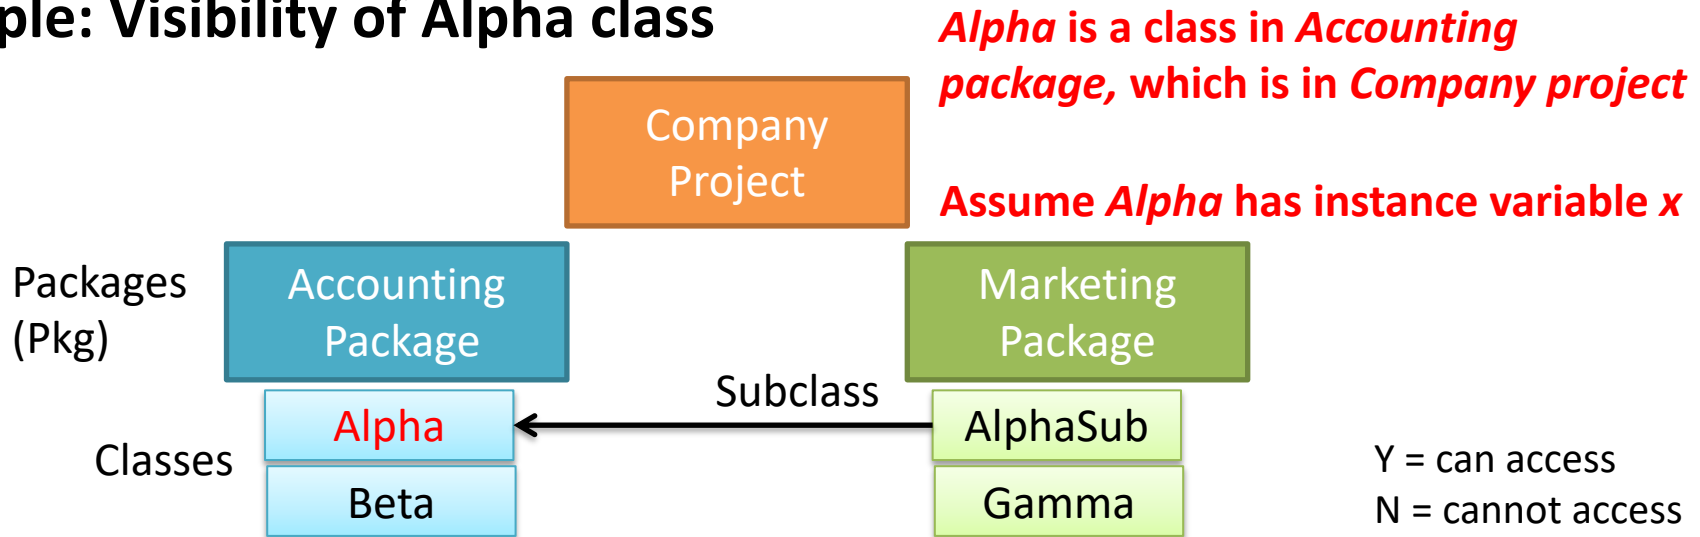

If Alpha.x is:	Alpha.x can be accessed by:	Accounting Pkg		Marketing Pkg	
		Alpha	Beta	AlphaSub	Gamma
public	Any class	Y	Y	Y	Y
protected	Pkg + Subclass	Y	Y	Y	N
No modifier	Pkg - Subclass	Y	Y	N	N
private	This class only	Y	N	N	N

Visibility depends on modifier applied


Example: Visibility of Alpha class

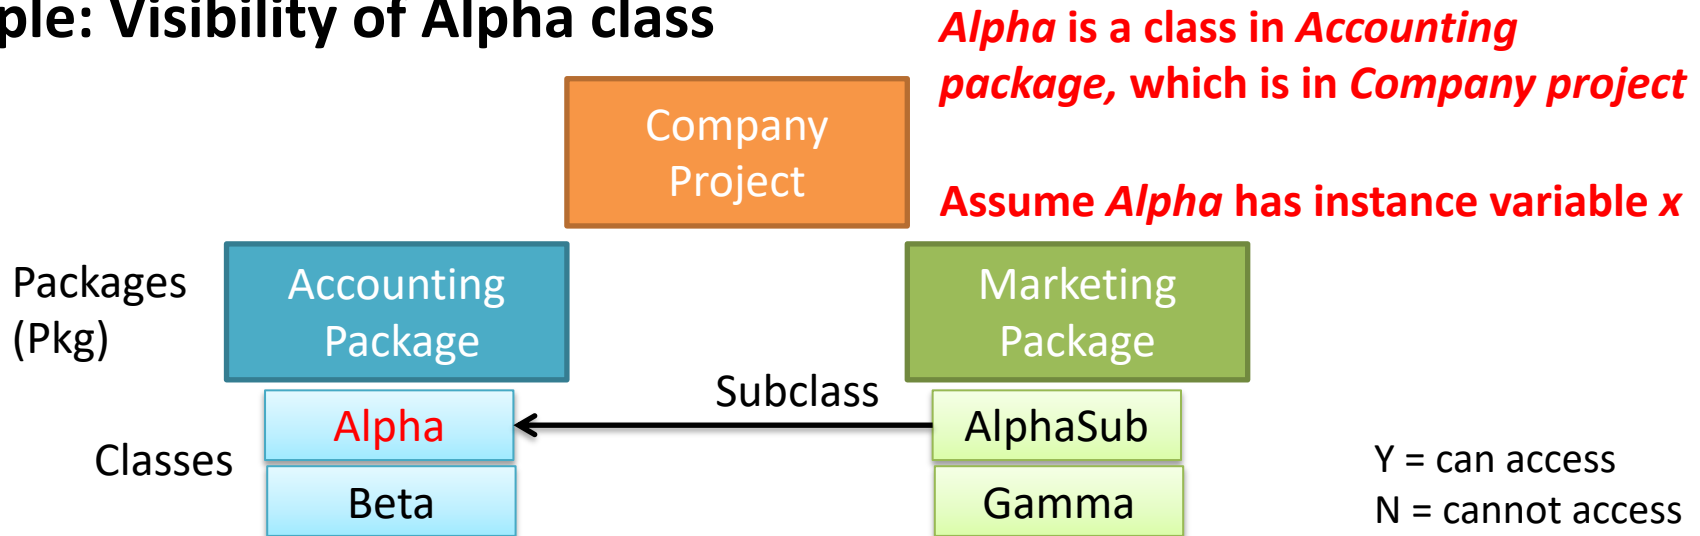

If Alpha.x is:	Alpha.x can be accessed by:	Accounting Pkg		Marketing Pkg	
		Alpha	Beta	AlphaSub	Gamma
public	Any class	Y	Y	Y	Y
protected	Pkg + Subclass	Y	Y	Y	N
No modifier	Pkg - Subclass	Y	Y	N	N
private	This class only	Y	N	N	N

Visibility depends on modifier applied


Example: Visibility of Alpha class

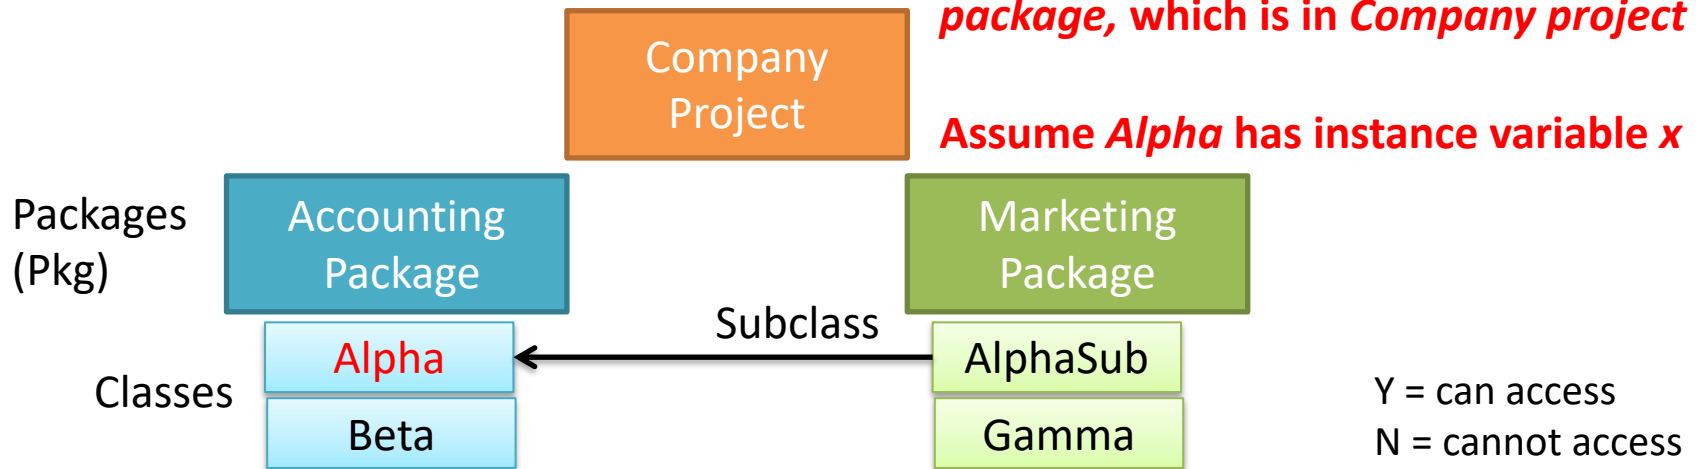

If Alpha.x is:	Alpha.x can be accessed by:	Accounting Pkg		Marketing Pkg	
		Alpha	Beta	AlphaSub	Gamma
public	Any class	Y	Y	Y	Y
protected	Pkg + Subclass	Y	Y	Y	N
No modifier	Pkg - Subclass	Y	Y	N	N
private	This class only	Y	N	N	N

Visibility depends on modifier applied

Example: Visibility of Alpha class

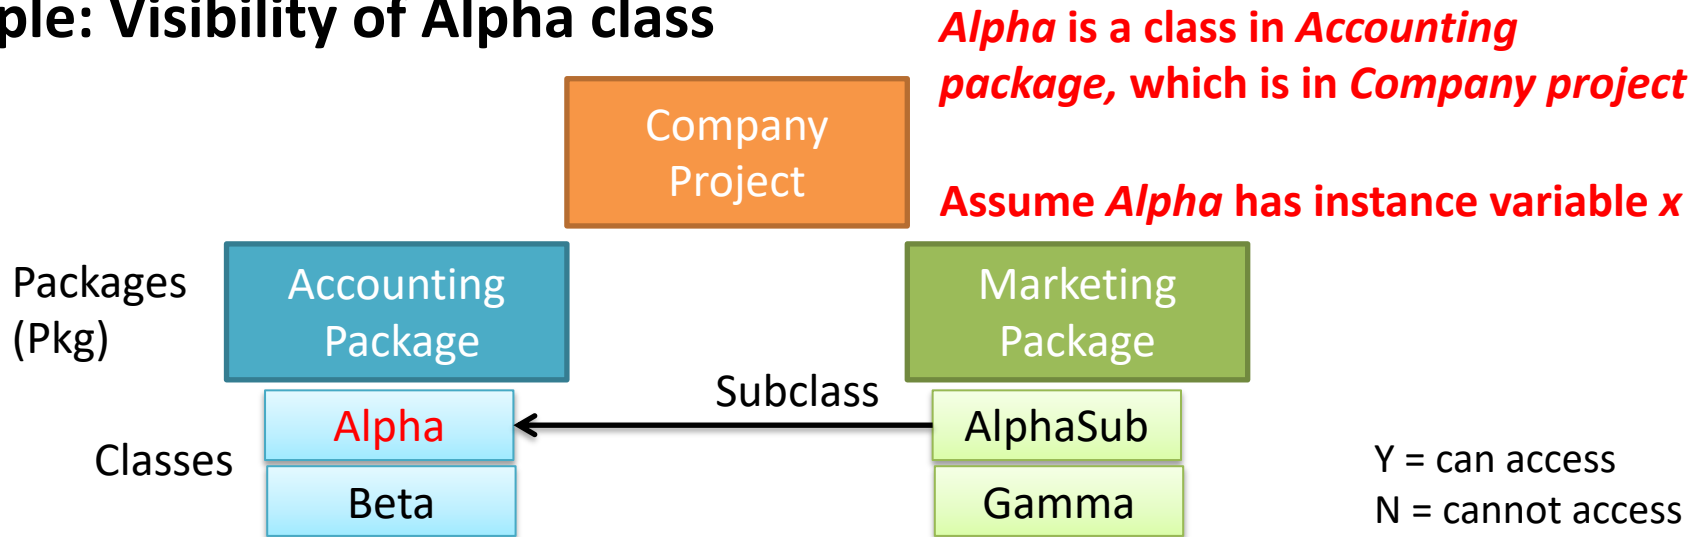

If Alpha.x is:	Alpha.x can be accessed by:	Accounting Pkg		Marketing Pkg	
		Alpha	Beta	AlphaSub	Gamma
public	Any class	Y	Y	Y	Y
protected	Pkg + Subclass	Y	Y	Y	N
No modifier	Pkg - Subclass	Y	Y	N	N
private	This class only	Y	N	N	N

Summary

- By simply adding “extends”, a subclass gets all base class:
 - Instance variables (no need to redefine name and Id)
 - Methods
- Subclass can override base class method to create specialty versions (polymorphism)
 - Give same method name in the subclass as in the base class
 - Java will run the subclass’s method when called
 - Subclass method can call base class method
super.<methodName>
 - Dynamic dispatch hunts upward if subclass does not define method
- Inheritance reduces duplicate code
 - Just use the code written and debugged for the base class
 - Changing base class updates subclass

Summary

- Comparison of objects with “==” corresponds to checking if the address is the same
 - Implement “equals”
- Arrays can store subclass objects, as long as the array is declared with the base class
 - An explicit cast might be necessary
- Access modifiers to control access to instance variables and methods

Next

- Graphics


Additional Resources

Inheritance

ANNOTATED SLIDES

Inheritance allows us to reuse code that has already been written and debugged

College application

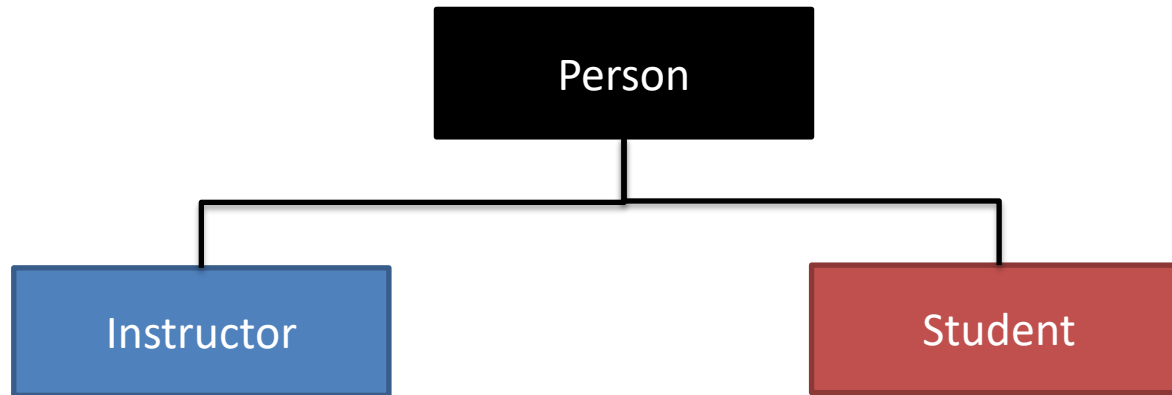

- In a college application, instructors and students are both people
- As people, there are some things that are common groups
 - Name
 - ID
- We can create a Person class as a “Base class”
- After debugging the person class, we can reuse the code from the base class to create specialty “subclasses” that inherit the instance variables and methods of the base class
- Subclasses can override the methods of the base class

The Person base class has instance variables and methods

Person.java

```
public class Person {  
    String name;  
    String Id;
```

Remember: by convention, class names start with capital letter; variables use camelCase I'll be looking for you to follow this convention

```
    public Person(String name, String Id) {  
        this.name = name;  
        this.Id = Id;  
    }
```

Simple constructor saves name and Id

```
    public String getName() { return name; }  
    public String getId() { return Id; }
```

- **Getter and setter methods (note: JavaDoc removed to fit on slide)**
- **Could have other methods that do more complicated things**
- **Here we keep it simple**

```
    public void setName(String name) { this.name = name; }  
    public void setId(String Id) { this.Id = Id; }
```

```
    /**  
     * Returns a String representation of a Person  
     * @return String  
     */
```

Remember: toString returns a String!


```
    public String toString() {  
        String s = "Name: " + name + " (" + Id + ")";  
        return s;  
    }
```

Here we add name and Id

Don't forget to return the String

Subclasses inherit the instance variables and methods of the base class

College application

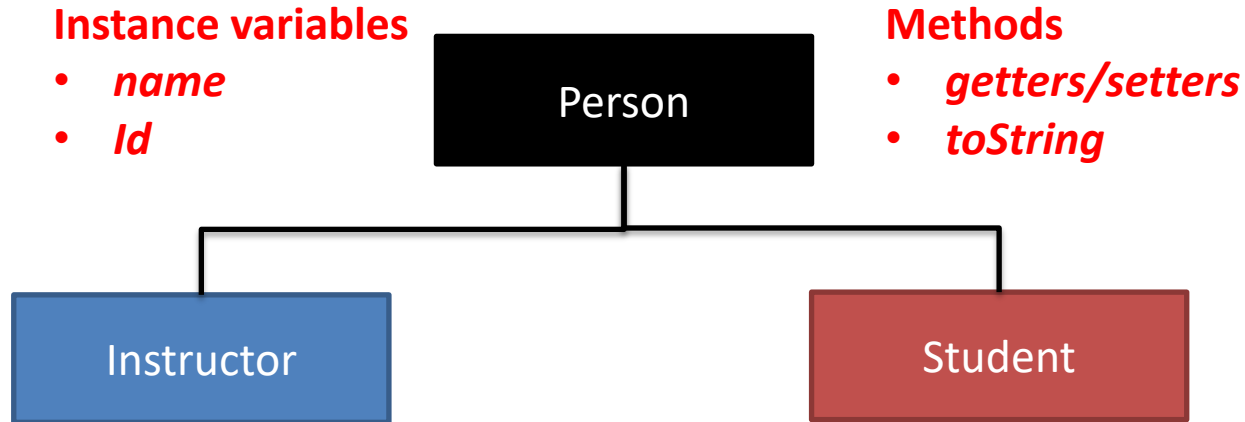


- If the Person class was a complex class, there could be hundreds of lines of code
- No sense duplicating that code
- With inheritance subclasses get the instance variables and methods already written and debugged in the base class
- Ever heard of DIY?
- Don't Repeat Yourself!
- Duplicating code causes problems if you later make a change
- In that case you must remember to change the code everywhere it is duplicated
- With inheritance, changes in the base class are automatically inherited in subclasses
- An Instructor "is a" Person. A Student "is a" Person too! They are just specialty versions

Note: base class, super class, and parent class all mean the same thing!

Subclasses inherit the instance variables and methods of the base class

College application

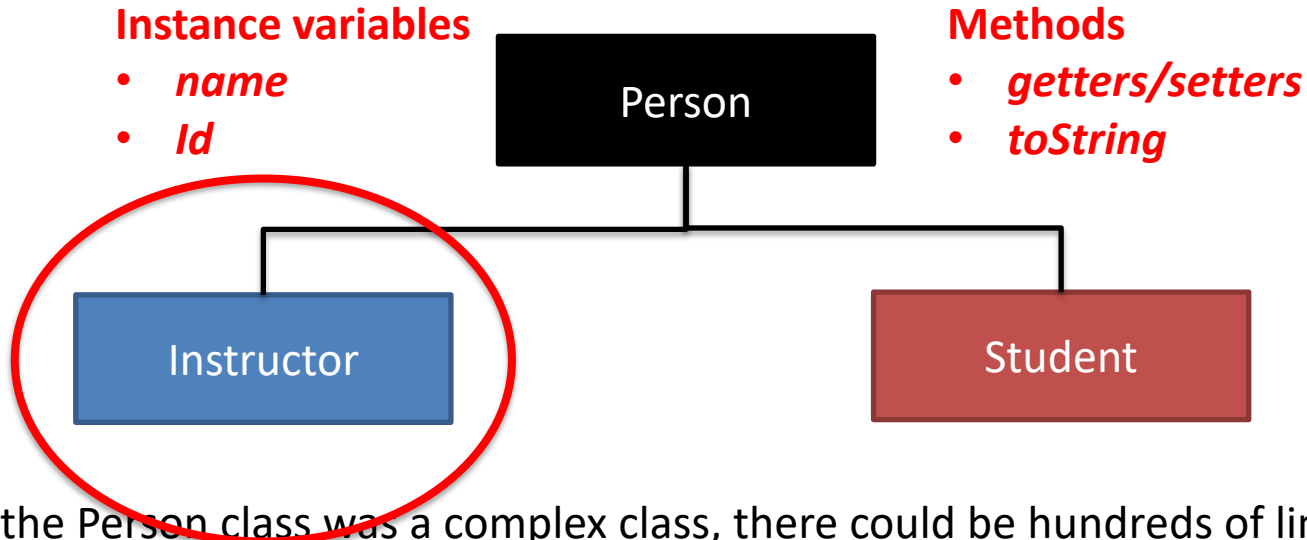

- If the Person class was a complex class, there could be hundreds of lines of code
- No sense duplicating that code
- With inheritance subclasses get the instance variables and methods already written and debugged in the base class
- Ever heard of DIY?
- Don't Repeat Yourself!
- Duplicating code causes problems if you later make a change
- In that case you must remember to change the code everywhere it is duplicated
- With inheritance, changes in the base class are automatically inherited in subclasses
- An Instructor "is a" Person. A Student "is a" Person too! They are just specialty versions

Note: base class, super class, and parent class all mean the same thing!

Use “extends” to inherit instance variables and methods from base class

Instructor.java

```
public class Instructor extends Person {
    boolean tenured;
    int yearsEmployed;
    String department;

    public Instructor(String name, String Id) {
        super(name, Id);
        this.tenured = false; //not required, Java initializes boolean instance variables to false
        this.yearsEmployed = 0; //not required, Java initializes numeric values instance variables to 0
        this.department = null; //not required, Java initializes objects to null
    }

    public Instructor(String name, String Id, boolean tenured, int yearsEmployed, String department) {
        super(name, Id);
        this.tenured = tenured;
        this.yearsEmployed = yearsEmployed;
        this.department = department;
    }
}
```

- “extends” keyword tells Java this class inherits Person’s instance variables and methods
- Note: no *name* and *Id* instance variables declared, but Person has them due to “extends”

Instructors have additional instance variables that the base class Person does not have

Two overloaded constructors

- One takes two parameters
- The other takes five parameters

- *super* calls the constructor on the base (aka super) class
- If the constructor in Person was complex, no need to duplicate that code, just call it
- Eliminates code redundancy and reduces likelihood of mistakes

Subclasses can add instance variables and methods the base class does not have

```
/**
 * Getters and setters
 */
public boolean getTenuredStatus() { return tenured;}
public int getYearsEmployed() { return yearsEmployed;}
public String getDepartment() { return department; }
```

```
public void setTenured(boolean tenured) { this.tenured = tenured; }
public void setYearsEmployed(int yearsEmployed) { this.yearsEmployed = yearsEmployed; }
public void setDepartment(String department) { this.department = department; }
```

```
/**
 * Return a String representation of an instructor
 * @return - string representing the instructor
 */
@Override
public String toString() {
    String s = super.toString() + "\n";
    s += "\tTenured: " + tenured + "\n";
    s += "\tYears Employed: " + yearsEmployed + "\n";
    s += "\tDepartment: " + department;
    return s;
}
```

- Base class **Person** does not have instance variables

- *tenured*
- *yearsEmployed*
- *department*

- Base class also does not have getters/setters defined by subclass

- Subclasses can change the behavior of methods defined in the base class
- This change is called overriding the base class
- Here *toString* is defined in the base class and also in the subclass
- This version adds additional information to the String returned
- Calling *super.toString* calls the base class method
- What if this code didn't say *super*, just *toString*?
- Recursively this method!

Subclasses can add instance variables and methods the base class does not have

Instructor.java


```
/**
 * Getters and setters
 */
public boolean getTenuredStatus() { return tenured;}
public int getYearsEmployed() { return yearsEmployed;}
public String getDepartment() { return department; }

public void setTenured(boolean tenured) { this.tenured = tenured; }
public void setYearsEmployed(int yearsEmployed) { this.yearsEmployed = yearsEmployed; }
public void setDepartment(String department) { this.department = department;}
```

```
/**
 * Return a String representation of an instructor
 * @return - string representing the instructor
 */
@Override
public String toString() {
    String s = super.toString() + "\n";
    s += "\tTenured: " + tenured + "\n";
    s += "\tYears Employed: " + yearsEmployed + "\n";
    s += "\tDepartment: " + department;
    return s;
}
```

- **@Override decorator is not required**
- **Tells Java, "I intend to override the base classes method"**
- **Java will flag an exception if the method does not appear in the base class**
- **Perhaps you made a typo and wrote "toSTring" instead of "toString"**
- **If there is no "toSTring" method in the base class, Java will alert you before you run code**
- **Good habit to include @Override**


Dynamic dispatch hunts up the inheritance chain to find methods

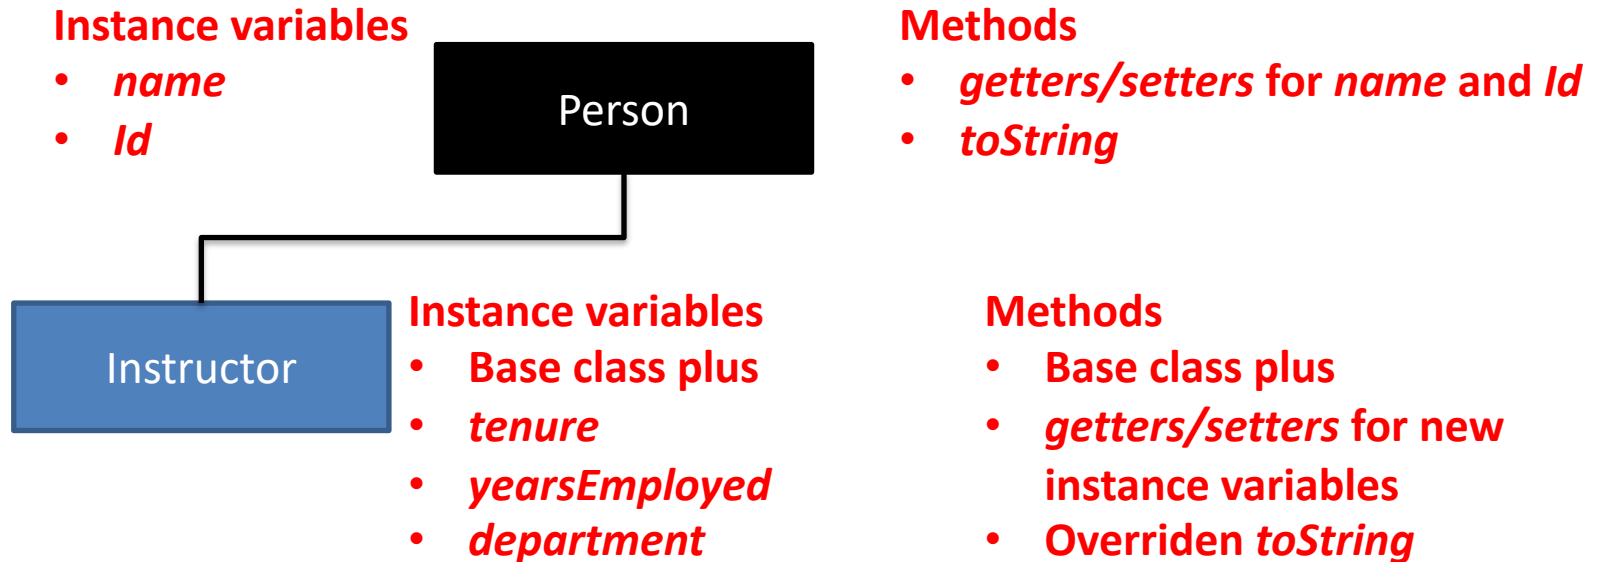

- Calling *toString* on an Instructor object will run the Instructor's *toString* code
- Calling *toString* on a Person object will run the Person's *toString* code
- If a method is called on subclass that the subclass does not define, Java hunts up the inheritance chain to look for the method
- For example, *setName* is not defined by Instructor, so calling it on an *Instructor* will cause Java to first examine the *Instructor* class, when that method is not found, it will check the base class
- In this case *setName* is defined on the base class, so Java will run that code
- This hunting upward is called dynamic dispatch
- If the method is never found, Java will throw an exception

Dynamic dispatch hunts up the inheritance chain to find methods

DynamicDispatchExample.java

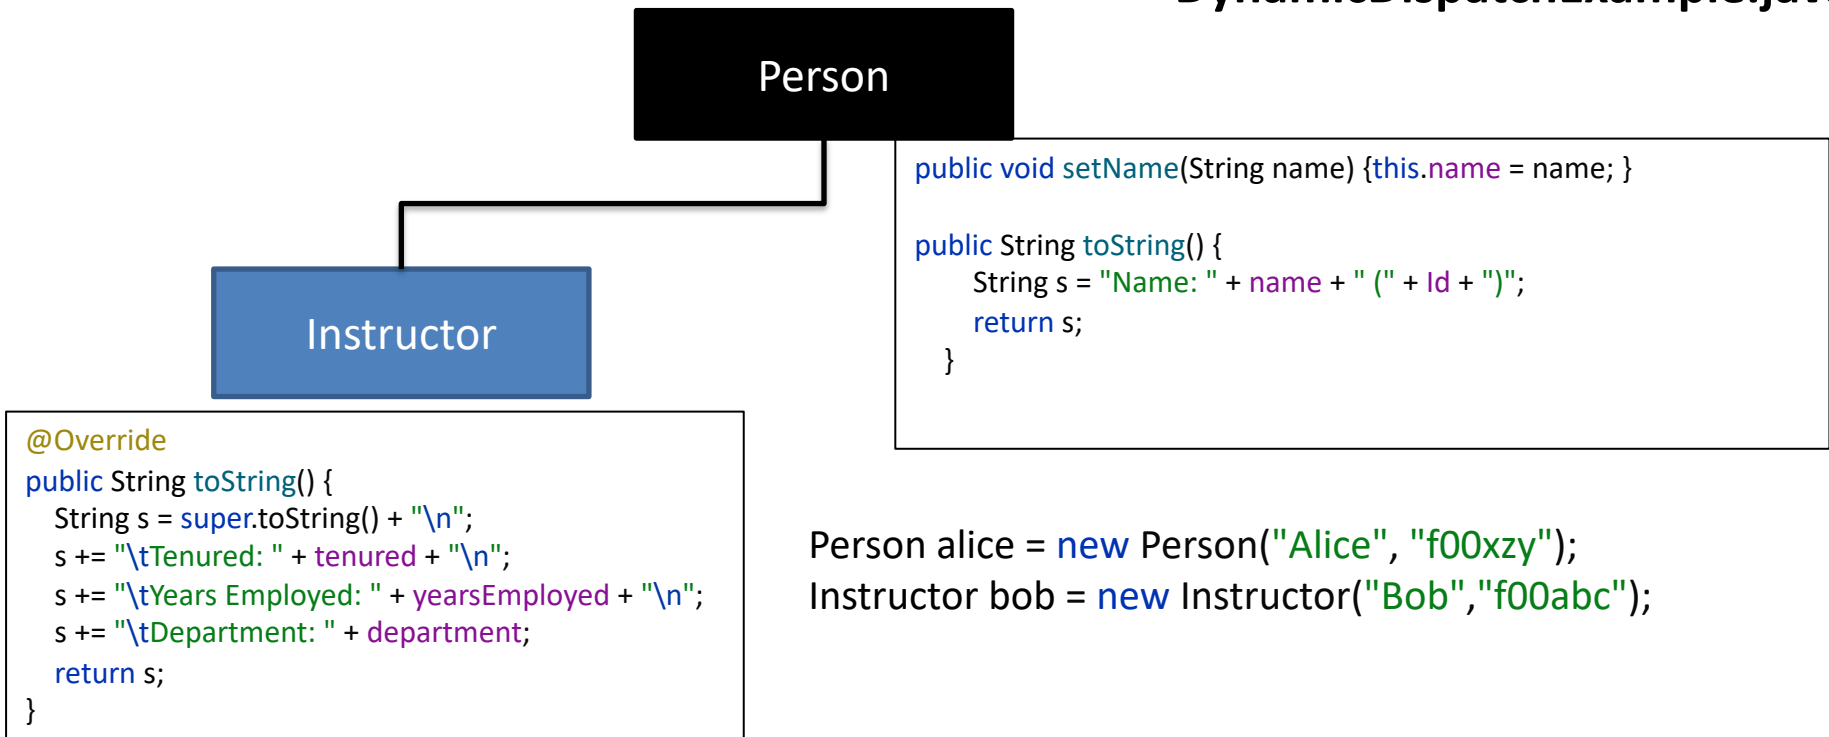

Declare two objects *Person alice* and *Instructor bob*

Dynamic dispatch starts at the class the object was declared, runs method if found

DynamicDispatchExample.java

Look for *toString* here
Found! Run this code

Person

```
public void setName(String name) {this.name = name; }  
  
public String toString() {  
    String s = "Name: " + name + " (" + Id + ")";  
    return s;  
}
```

Instructor

@Override


```
public String toString() {  
    String s = super.toString() + "\n";  
    s += "\tTenured: " + tenured + "\n";  
    s += "\tYears Employed: " + yearsEmployed + "\n";  
    s += "\tDepartment: " + department;  
    return s;  
}
```

```
Person alice = new Person("Alice", "f00xzy");  
Instructor bob = new Instructor("Bob", "f00abc");  
System.out.println(alice);
```

- Printing Person object *alice* calls *toString* behind the scenes
- *Person* class *toString* runs because *alice* is declared as a Person object
- NOTE: this is an example of Polymorphism (same name, many meanings)
- Same name *toString*, different results

Dynamic dispatch hunts up the inheritance chain if method is not found

DynamicDispatchExample.java

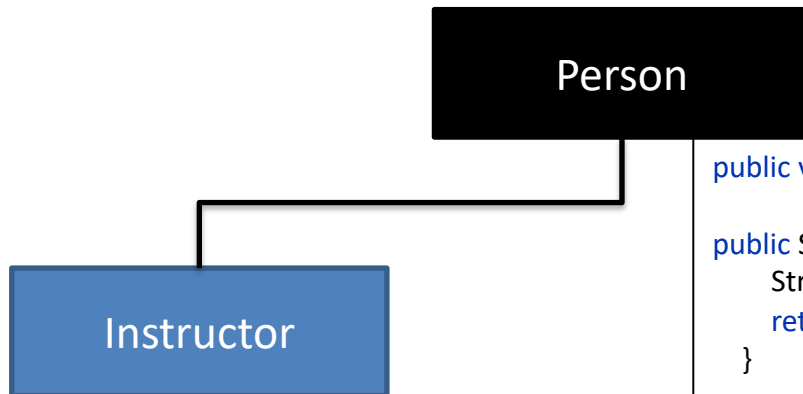

```
@Override
public String toString() {
    String s = super.toString() + "\n";
    s += "\tTenured: " + tenured + "\n";
    s += "\tYears Employed: " + yearsEmployed + "\n";
    s += "\tDepartment: " + department;
    return s;
}
```

```
public void setName(String name) {this.name = name; }


public String toString() {
    String s = "Name: " + name + "(" + Id + ")";
    return s;
}
```

```
Person alice = new Person("Alice", "f00xzy");
Instructor bob = new Instructor("Bob", "f00abc");
System.out.println(alice);
bob.setName("Bobby");
```

First look for *setName* here
Not found
Check base class

- **Call *setName* on *Instructor bob***
- ***Instructor* does not define *setName***

Dynamic dispatch hunts up the inheritance chain if method is not found

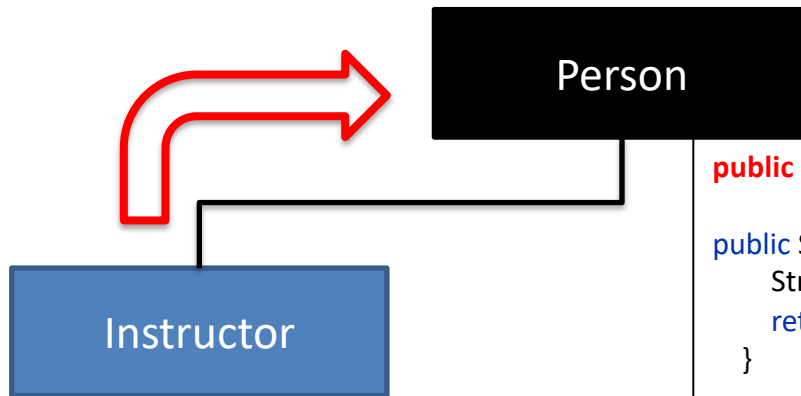

```
@Override
public String toString() {
    String s = super.toString() + "\n";
    s += "\tTenured: " + tenured + "\n";
    s += "\tYears Employed: " + yearsEmployed + "\n";
    s += "\tDepartment: " + department;
    return s;
}
```

First look for *setName* here
Not found
Check base class

DynamicDispatchExample.java

Second look for *setName* here
Found! Run this code

```
public void setName(String name) {this.name = name; }


public String toString() {
    String s = "Name: " + name + " (" + Id + ")";
    return s;
}
```

```
Person alice = new Person("Alice", "f00xzy");
Instructor bob = new Instructor("Bob", "f00abc");
System.out.println(alice);
bob.setName("Bobby");
```

- Call *setName* on *Instructor bob*
- *Instructor* does not define *setName*

Run subclass code if a method is overridden

DynamicDispatchExample.java

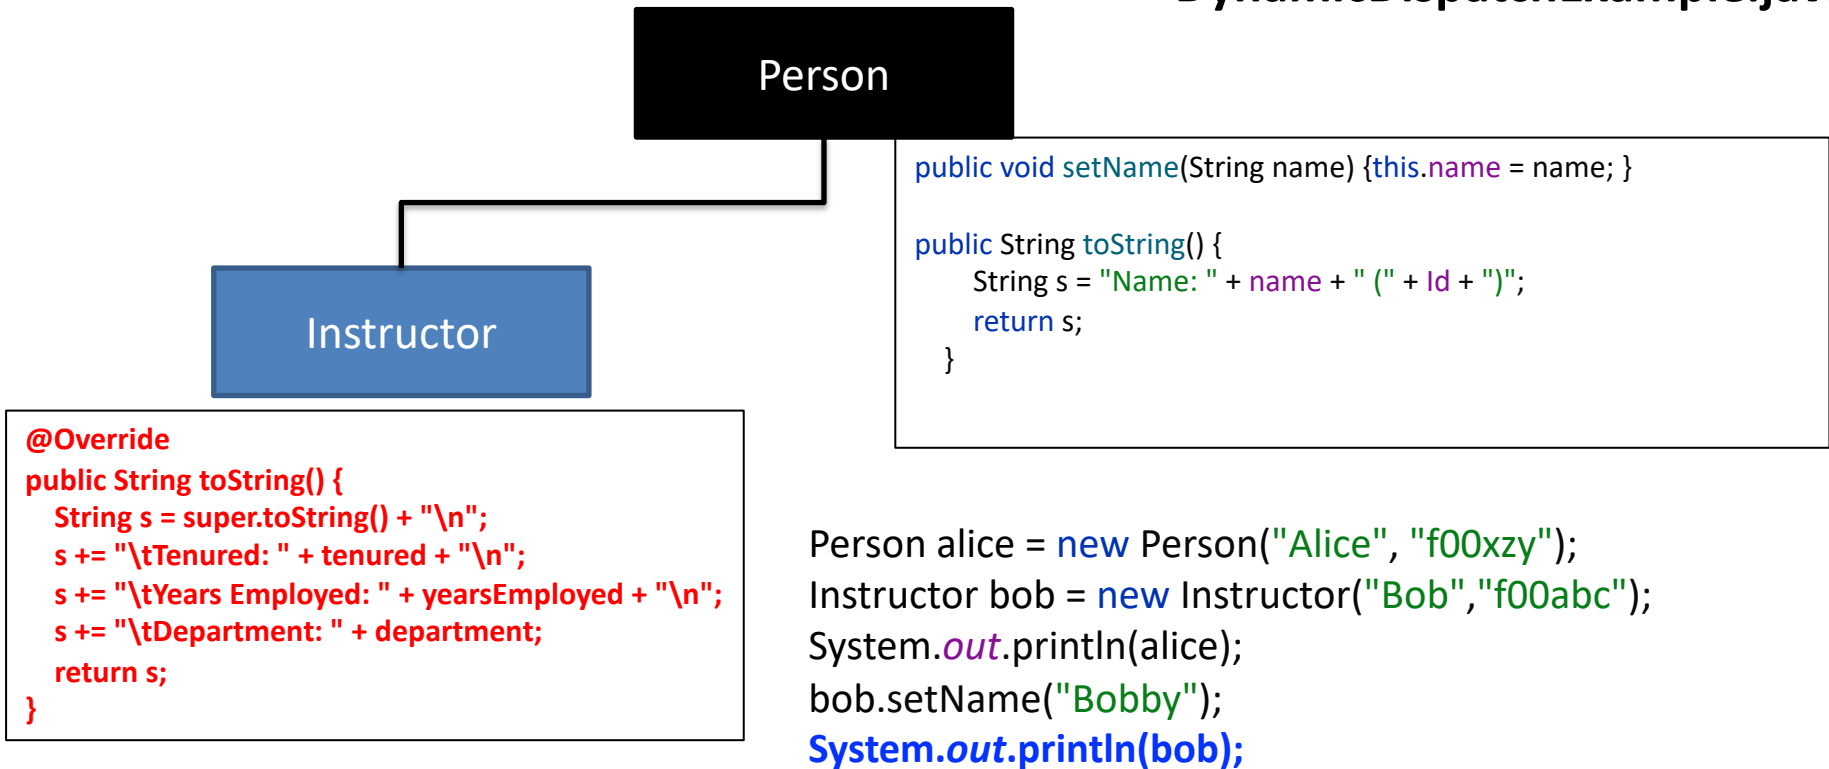


First look for *toString* here
Found!
Run this code

Printing Instructor *bob*
Instructor class overrides *toString*
Use the most specific method
Here use Instructor's *toString* method

Dynamic dispatch starts at the class the object was declared, runs method if found

DynamicDispatchExample.java

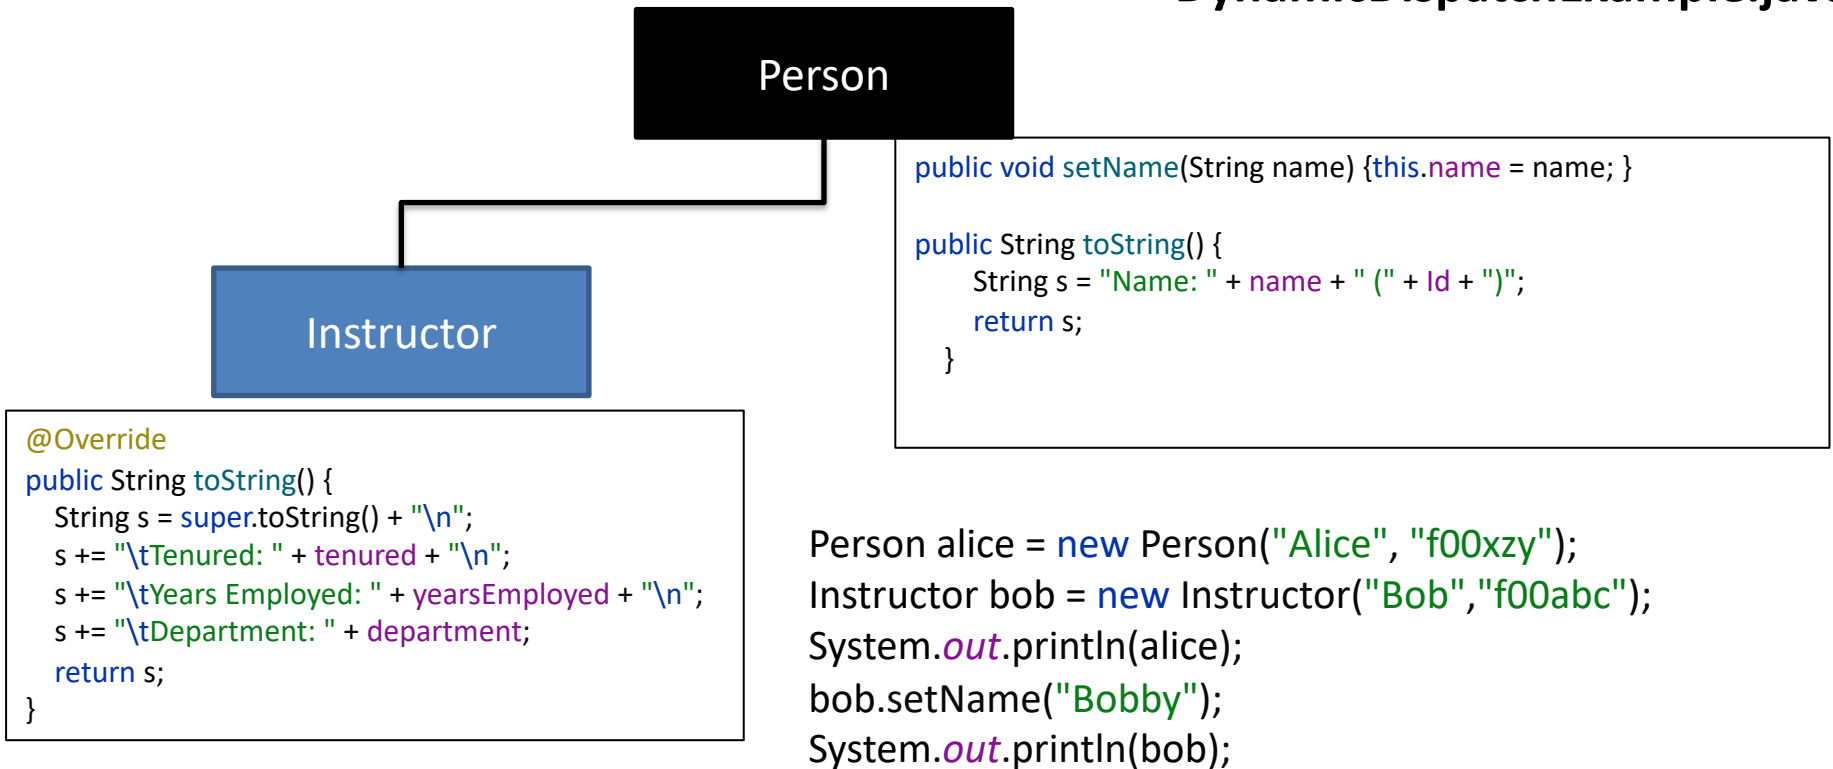

```
Person alice = new Person("Alice", "f00xzy");
Instructor bob = new Instructor("Bob", "f00abc");
System.out.println(alice);
bob.setName("Bobby");
System.out.println(bob);
```

Output


```
Name: Alice (f00xzy)
Name: Bobby (f00abc)
Tenured: false
Years Employed: 0
Department: null
```

Name changed to Bobby by
Person's setName

From Instructor toString

Multiple classes can inherit the same base class, each providing a specialty version

College application

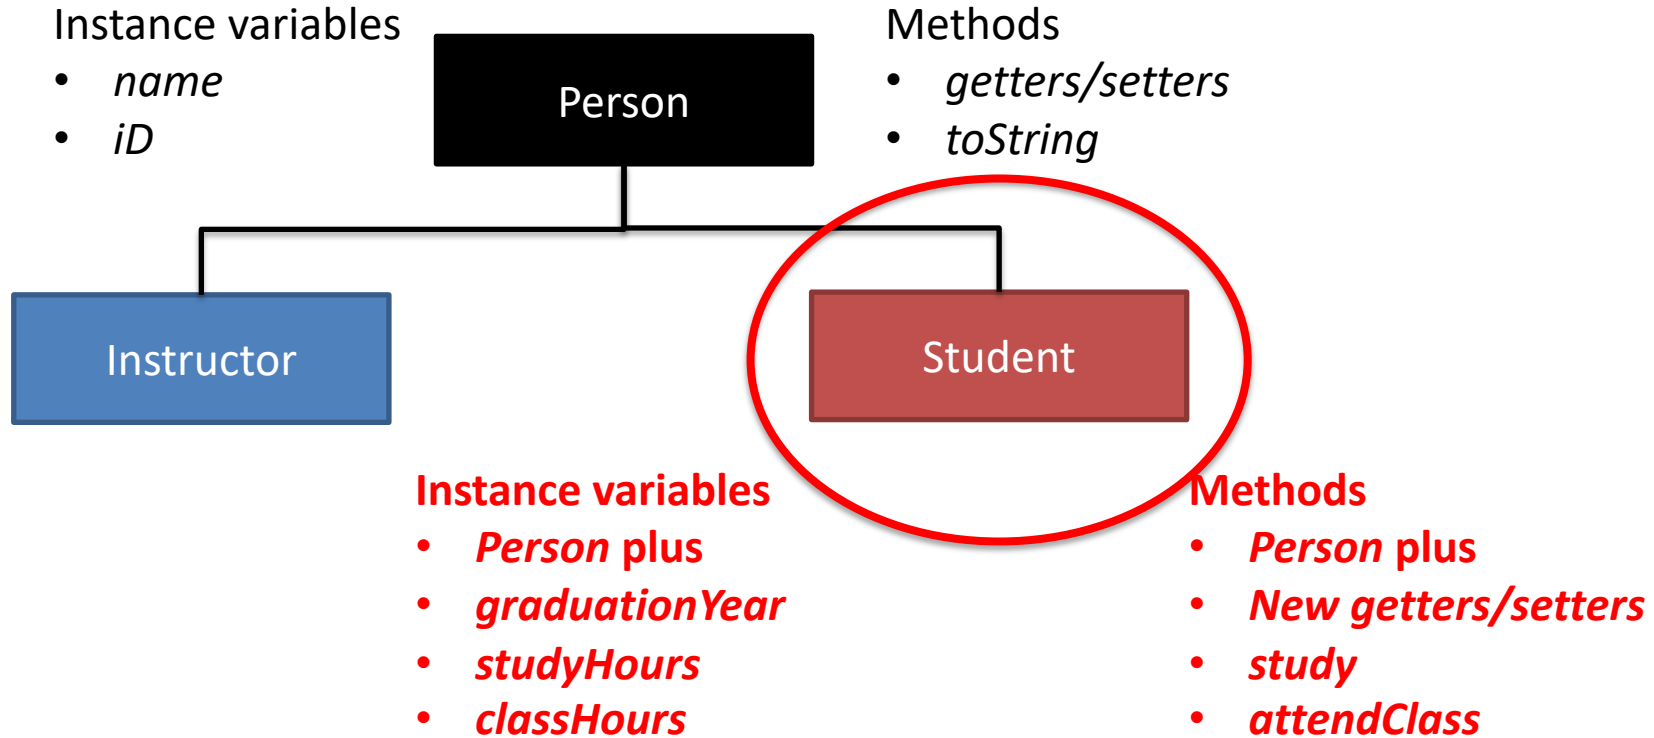

The Student class also inherits from the Person class, but behaves differently

Student.java

```
public class Student extends Person {
    protected Integer graduationYear;
    double studyHours;
    double classHours;

    public Student(String name, String Id) {
        super(name, Id);
        graduationYear = null;
        studyHours = 0;
        classHours = 0;
    }

    public double study(double hoursSpent) {
        System.out.println("Hi Mom! It's " + name + ". I'm studying!");
        studyHours += hoursSpent;
        return studyHours;
    }

    public double attendClass(double hoursSpent) {
        System.out.println("Hi Dad! It's " + name + ". I'm in class!");
        classHours += hoursSpent;
        return classHours;
    }

    @Override
    public String toString() {
        String s = super.toString() + "\n";
        s += "\tGraduation year: " + graduationYear + "\n";
        s += "\tHours studying: " + studyHours + "\n";
        s += "\tHours in class: " + classHours;
        return s;
    }
}
```

**Students have name and Id, just like Instructors
But, Students have additional information**

- *graduationYear*
- *studyHours*
- *classHours*
- **Students also have methods Persons and Instructors do not have**
 - *study*
 - *attendClass*
- **Student also overrides toString so output is different for Students than for Persons and Instructors**

The Student class also inherits from the Person class, but behaves differently

Student.java

```
public class Student extends Person {
    protected Integer graduationYear;
    double studyHours;
    double classHours;

    public Student(String name, String Id) {
        super(name, Id);
        graduationYear = null;
        studyHours = 0;
        classHours = 0;
    }

    public double study(double hoursSpent) {
        System.out.println("Hi Mom! It's " + name + ". I'm studying!");
        studyHours += hoursSpent;
        return studyHours;
    }

    public double attendClass(double hoursSpent) {
        System.out.println("Hi Dad! It's " + name + ". I'm in class!");
        classHours += hoursSpent;
        return classHours;
    }


    @Override
    public String toString() {
        String s = super.toString() + "\n";
        s += "\tGraduation year: " + graduationYear + "\n";
        s += "\tHours studying: " + studyHours + "\n";
        s += "\tHours in class: " + classHours;
        return s;
    }
}
```

Note: *graduationYear* is of type *Integer* (autoboxed version of primitive data type) so we can set it to *null* (instead of 0) if we do not have a value


Otherwise *graduationYear* would be 0 by default, but in some cases 0 might be a valid value

Null is different from 0, it indicates that we do not have a value


Classes can inherit from other inherited classes, forming a chain

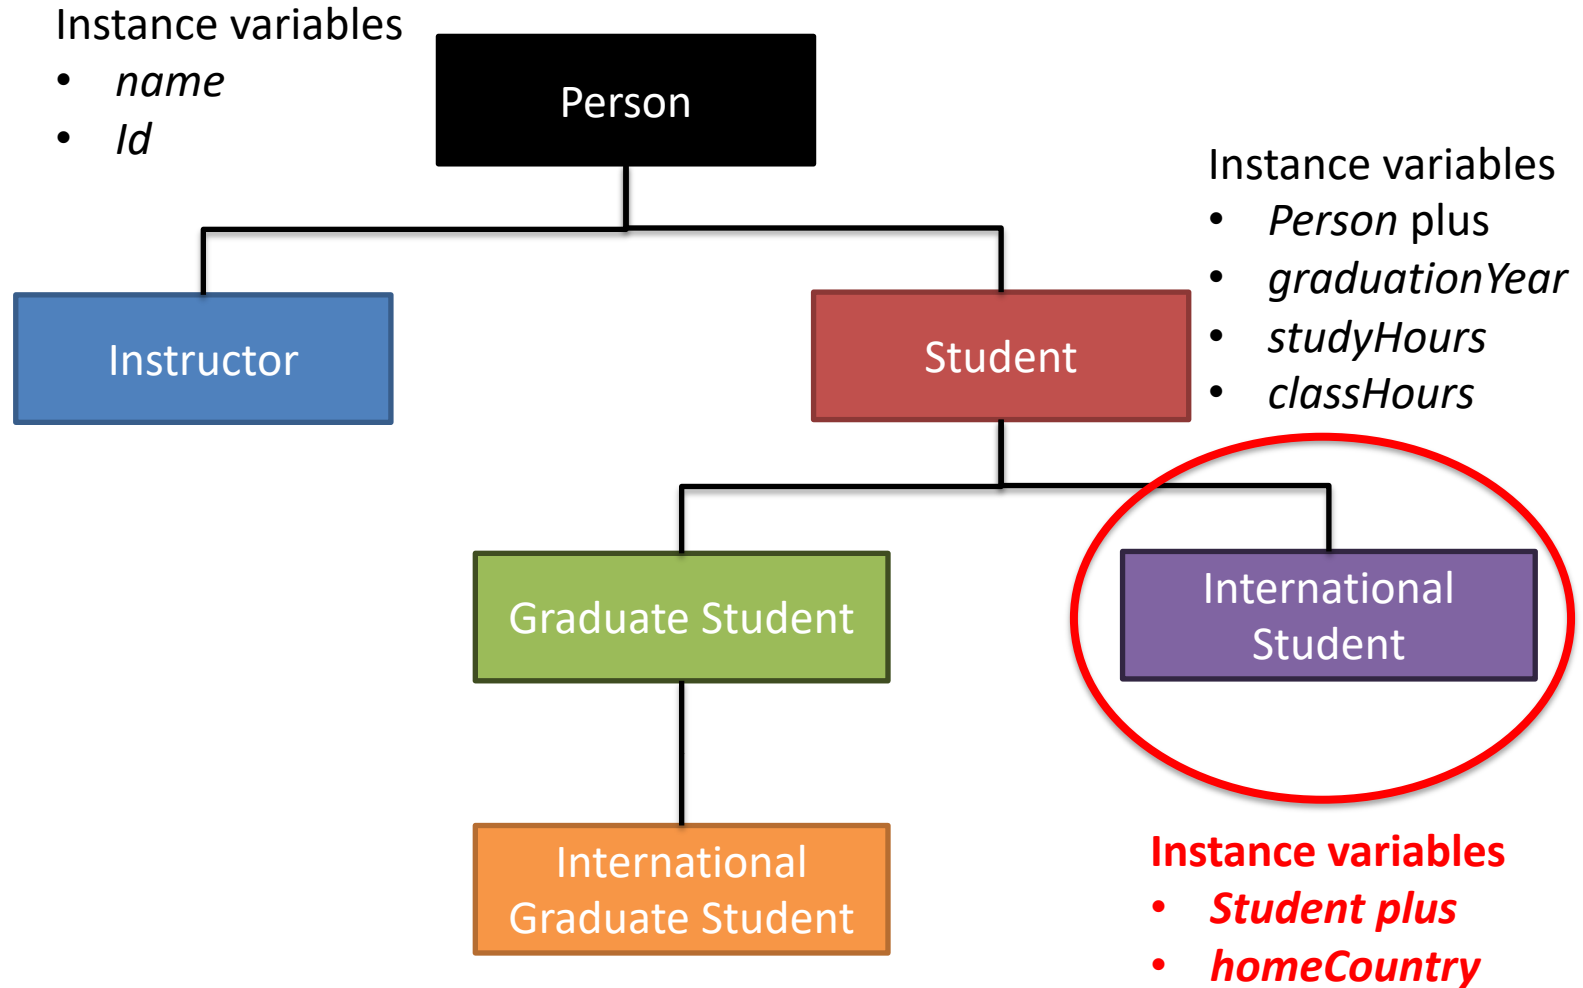

Classes can inherit from other inherited classes, forming a chain

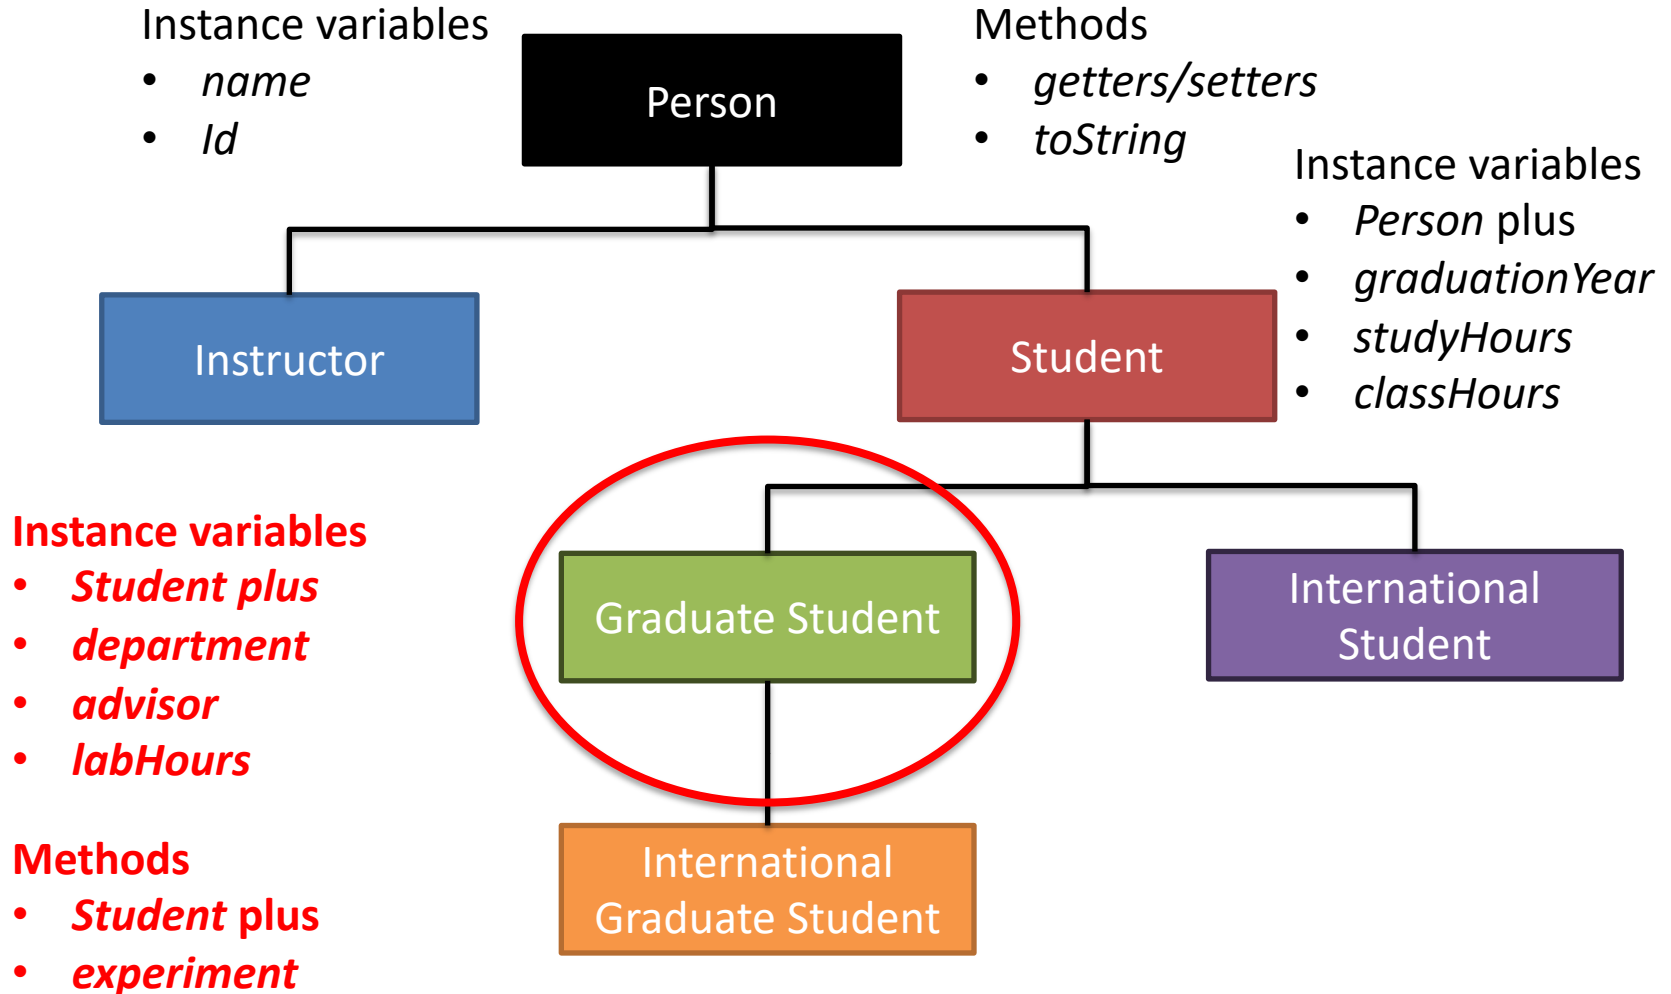

Classes can inherit from other inherited classes, forming a chain

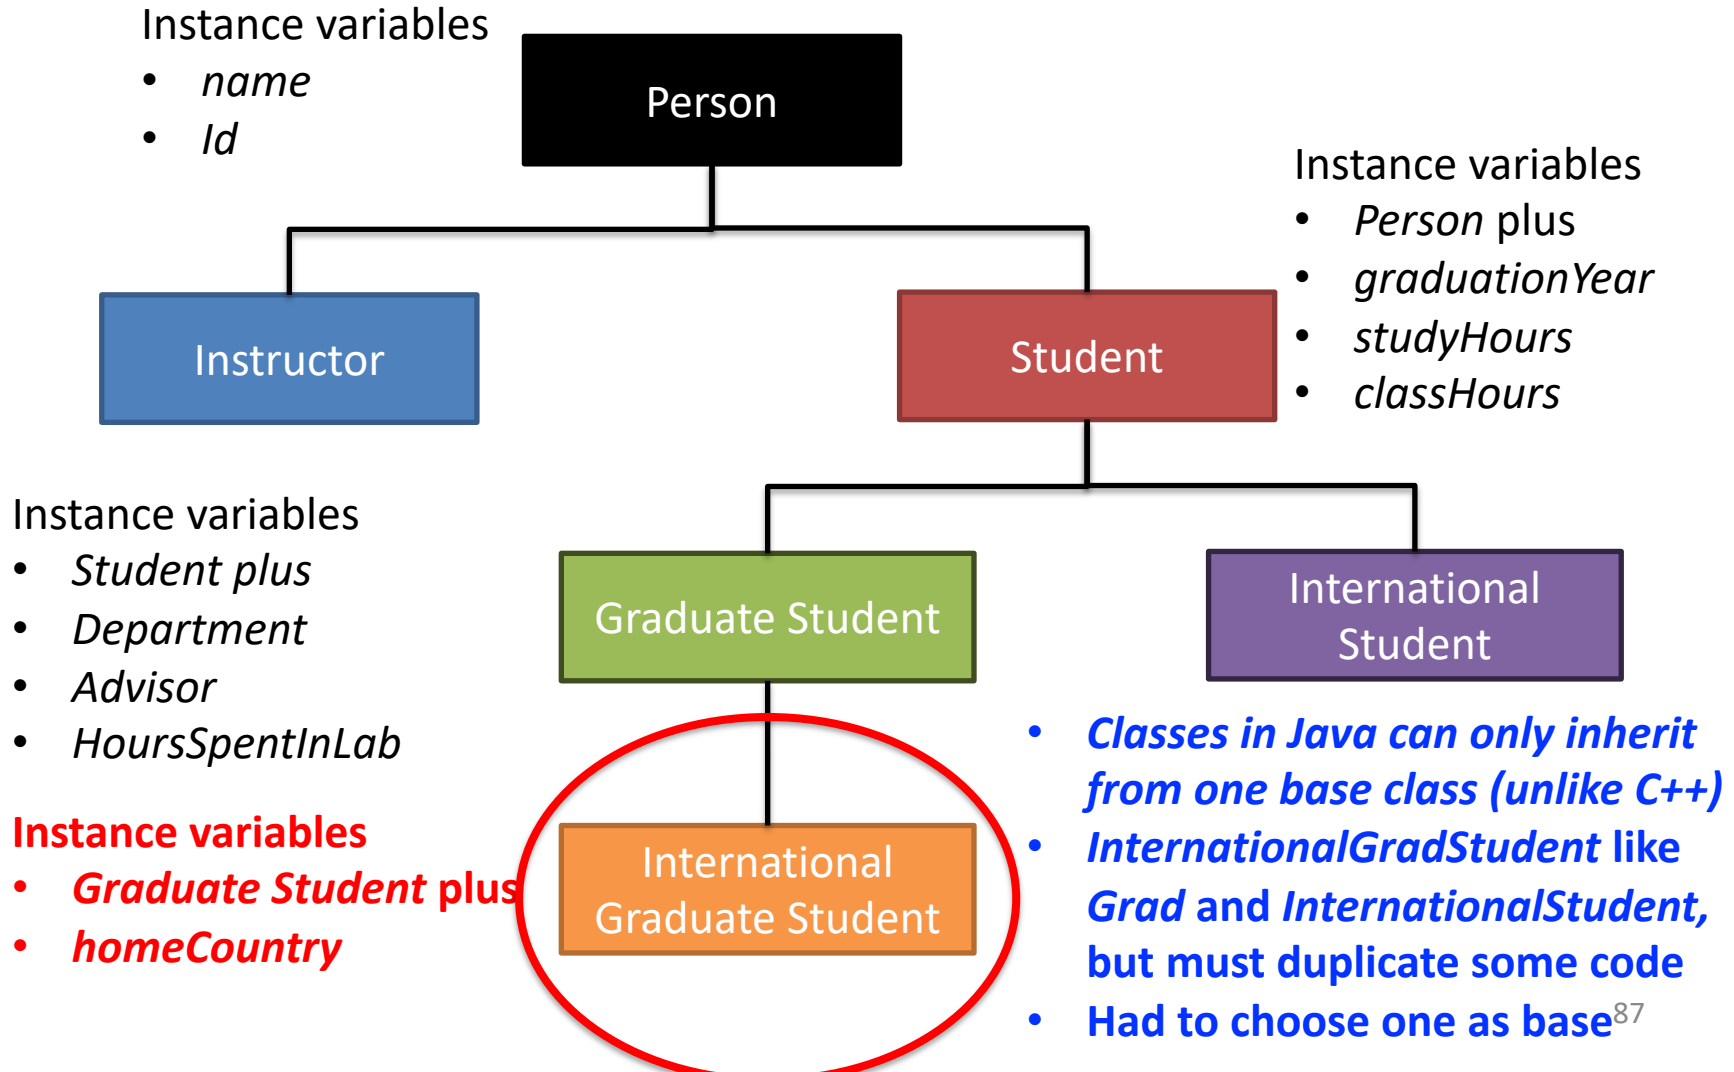

Comparison

ANNOTATED SLIDES

Use == when comparing primitives

```
public class CompareTest {  
    public static void main(String[] args) {  
        int a = 7;  
        int b = 5; a and b are not equal  
        System.out.println("Check primitive variables");  
        System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
    }  
}
```

CompareTest.java

Output

Check primitive variables
a=7 b=5 same:false

Use == when comparing primitives

```
public class CompareTest {  
    public static void main(String[] args) {  
        int a = 7;  
        int b = 5;  
        System.out.println("Check primitive variables");  
        System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
        b = 7; a and b are now equal  
        System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
    }  
}
```

CompareTest.java

Output

Check primitive variables

a=7 b=5 same:false

a=7 b=7 same:true

Using == when comparing objects checks to see if they reference the same address

CompareTest.java

```
public class CompareTest {  
    public static void main(String[] args) {  
        int a = 7;  
        int b = 5;  
        System.out.println("Check primitive variables");  
        System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
        b = 7;  
        System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
  
        System.out.println("Check object variables");  
        Person alice = new Person("Alice", "f00abc");  
        Person ally = alice;  
        System.out.println("alice == ally: " + (alice==ally));  
    }  
}
```

Output

Check primitive variables
a=7 b=5 same:false
a=7 b=7 same:true


Check object variables
alice equals ally: true

alice and ally point to the same memory address on the heap

**== compares memory addresses and decides they are the same
(and they are exactly the same!)**

The right way to compare equality of objects is the *equals* method


```
/**
 * Compare two Person objects and decide if they are the same.
 * Use Id to decide
 * @param other compare this person's Id
 * @return true if Ids are the same, false otherwise
 */
public boolean equals(Person other) {
    if (Id.length() != other.Id.length()) {
        return false;
    }
    for (int i = 0; i < Id.length(); i++) {
        if (Id.charAt(i) != other.Id.charAt(i)) {
            return false;
        }
    }
    return true;
}
```

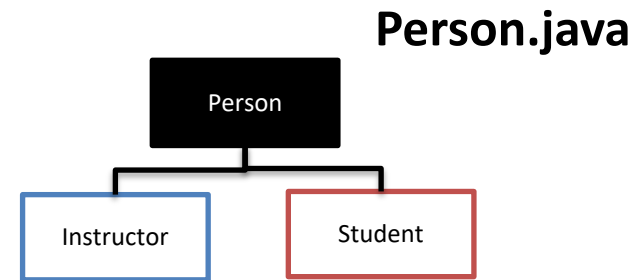

- **Java does not know the semantic meaning of objects we create**
- **Thus, Java does not know how to compare them**
- **We can provide an *equals* method to tell Java if we consider two objects to be equal**
- **We create an *equals* method in the Person base class, all subclasses will use this method due to dynamic dispatch if they do not override *equals***
- **We use *Id* to decide if two Person (or subclass) objects are equal**
- **Because IDs are Strings, we check the length and ensure each character matches**
- **Return true if same length and each character matches, false otherwise**

The right way to compare equality of objects is the *equals* method

```
/**
 * Compare two Person objects and decide if they are the same.
 * Use Id to decide
 * @param other compare this person's Id
 * @return true if Ids are the same, false otherwise
 */
public boolean equals(Person other) {
    // if (Id.length() != other.Id.length()) {
    //     return false;
    // }
    // for (int i = 0; i < Id.length(); i++) {
    //     if (Id.charAt(i) != other.Id.charAt(i)) {
    //         return false;
    //     }
    // }
    // return true;
    return Id.equals(other.Id);
}
```

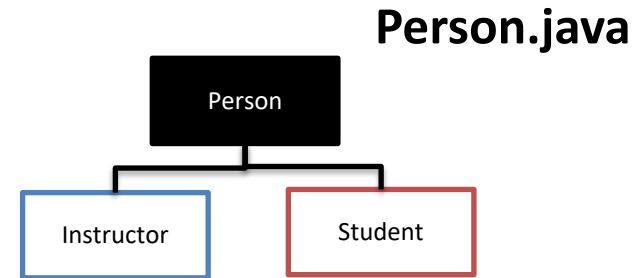

- Java has already provided an equals method for autoboxed types and Strings
- We can just use their equals method instead
- Thanks Java developers!

The right way to compare equality of objects is the *equals* method

```
public static void main(String[] args) {  
    int a = 7;  
    int b = 5;  
    System.out.println("Check primitive variables");  
    System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
    b = 7;  
    System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
  
    System.out.println("\nCheck object variables");  
    Person alice = new Person("Alice", "f00abc");  
    Person ally = alice;  
    System.out.println("alice == ally: " + (alice==ally));  
    System.out.println("alice equals ally: " + alice.equals(ally));  
}
```

Because *alice* and *ally* both point to the same memory address, they each have the same *Id* String

***equals* returns true here**

CompareTest.java

Output

Check primitive variables
a=7 b=5 same:false
a=7 b=7 same:true

Check object variables
alice == ally: true
alice equals ally: true

The right way to compare equality of objects is the *equals* method

```
public static void main(String[] args) {
    int a = 7;
    int b = 5;
    System.out.println("Check primitive variables");
    System.out.println("a=" + a + " b=" + b + " same:" + (a==b));
    b = 7;
    System.out.println("a=" + a + " b=" + b + " same:" + (a==b));

    System.out.println("\nCheck object variables");
    Person alice = new Person("Alice", "f00abc");
    Person ally = alice;
    System.out.println("alice == ally: " + (alice==ally));
    System.out.println("alice equals ally: " + alice.equals(ally));
    ally = new Person("Ally", "f00xyz");
    System.out.println("alice == ally: " + (alice==ally));
    System.out.println("alice equals ally: " + alice.equals(ally));
}
```

Now *ally* is instantiated as new object (so new memory address on heap) and different Id from *alice*
Both checks now return false

CompareTest.java

Output

```
Check primitive variables
a=7 b=5 same:false
a=7 b=7 same:true
```

```
Check object variables
alice == ally: true
alice equals ally: true
alice == ally: false
alice equals ally: false
```

The right way to compare equality of objects is the *equals* method

```
public static void main(String[] args) {  
    int a = 7;  
    int b = 5;  
    System.out.println("Check primitive variables");  
    System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
    b = 7;  
    System.out.println("a=" + a + " b=" + b + " same:" + (a==b));  
  
    System.out.println("\nCheck object variables");  
    Person alice = new Person("Alice", "f00abc");  
    Person ally = alice;  
    System.out.println("alice == ally: " + (alice==ally));  
    System.out.println("alice equals ally: " + alice.equals(ally));  
    ally = new Person("Ally", "f00xyz");  
    System.out.println("alice == ally: " + (alice==ally));  
    System.out.println("alice equals ally: " + alice.equals(ally));  
    ally.setId("f00abc");  
    System.out.println("alice == ally: " + (alice==ally));  
    System.out.println("alice equals ally: " + alice.equals(ally));  
}
```

CompareTest.java

Output

```
Check primitive variables  
a=7 b=5 same:false  
a=7 b=7 same:true
```

```
Check object variables  
alice == ally: true  
alice equals ally: true  
alice == ally: false  
alice equals ally: false  
alice == ally: false  
alice equals ally: true
```

**ally now gets same Id as alice
== false (different addresses)
equals method true (same Id)**

instanceof lets you check an object's type

```
public static void main(String[] args) {
```

<snip>

```
System.out.println("alice == ally: " + (alice==ally));  
System.out.println("alice equals ally: " + alice.equals(ally));
```

//instanceof tests

```
Person bob = new Instructor("Bob", "f00000");  
Person carol = new Student("Carol", "f11111");
```

Bob is an Instructor

Carol is a Student

CompareTest.java

Output

Check primitive variables

a=7 b=5 same:false

a=7 b=7 same:true

Check object variables

alice == ally: true

alice equals ally: true

alice == ally: false

alice equals ally: false

alice == ally: false

alice equals ally: true

instanceof lets you check an object's type

CompareTest.java

```
public static void main(String[] args) {
```

```
<snip>
```

```
System.out.println("alice == ally: " + (alice==ally));  
System.out.println("alice equals ally: " + alice.equals(ally));
```

```
//instanceof tests
```

```
Person bob = new Instructor("Bob", "f00000");
```

```
Person carol = new Student("Carol", "f11111");
```

```
if (bob instanceof Instructor) {  
    System.out.println("Bob is an instructor");
```

```
}
```

```
if (carol instanceof Instructor) {  
    System.out.println("Carol is an instructor");
```

```
}
```

```
}
```

Bob is an Instructor

Carol is a Student

**instanceof
checks type,
returns boolean**

Output

Check primitive variables

a=7 b=5 same:false

a=7 b=7 same:true

Check object variables

alice == ally: true

alice equals ally: true

alice == ally: false

alice equals ally: false

alice == ally: false

alice equals ally: true

instanceof lets you check an object's type

CompareTest.java

```
public static void main(String[] args) {
```

<snip>

```
System.out.println("alice == ally: " + (alice==ally));  
System.out.println("alice equals ally: " + alice.equals(ally));
```

```
//instanceof tests
```

```
Person bob = new Instructor("Bob", "f00000");
```

```
Person carol = new Student("Carol", "f11111");
```

```
if (bob instanceof Instructor) {  
    System.out.println("Bob is an instructor");  
}
```

```
if (carol instanceof Instructor) {  
    System.out.println("Carol is an instructor");  
}
```

```
}
```

Bob is an Instructor

Carol is a Student

**instanceof
checks type,
returns boolean**

Bob prints

Output

Check primitive variables

a=7 b=5 same:false

a=7 b=7 same:true

Check object variables

alice == ally: true

alice equals ally: true

alice == ally: false

alice equals ally: false

alice == ally: false

alice equals ally: true

Bob is an instructor

instanceof lets you check an object's type

CompareTest.java

```
public static void main(String[] args) {
```

```
<snip>
```

```
System.out.println("alice == ally: " + (alice==ally));  
System.out.println("alice equals ally: " + alice.equals(ally));
```

```
//instanceof tests
```

```
Person bob = new Instructor("Bob", "f00000");
```

```
Person carol = new Student("Carol", "f11111");
```

```
if (bob instanceof Instructor) {  
    System.out.println("Bob is an instructor");  
}
```

```
if (carol instanceof Instructor) {  
    System.out.println("Carol is an instructor");  
}
```

```
}
```

Output

Check primitive variables

a=7 b=5 same:false

a=7 b=7 same:true

Bob is an Instructor

Carol is a Student

Check object variables

alice == ally: true

alice equals ally: true

alice == ally: false

alice equals ally: false

alice == ally: false

alice equals ally: true


Bob is an instructor

**instanceof
checks type,
returns boolean**

Bob prints

**Carol does not print
because Carol is a Student**

Our classes inherit from Java's Object class behind the scenes

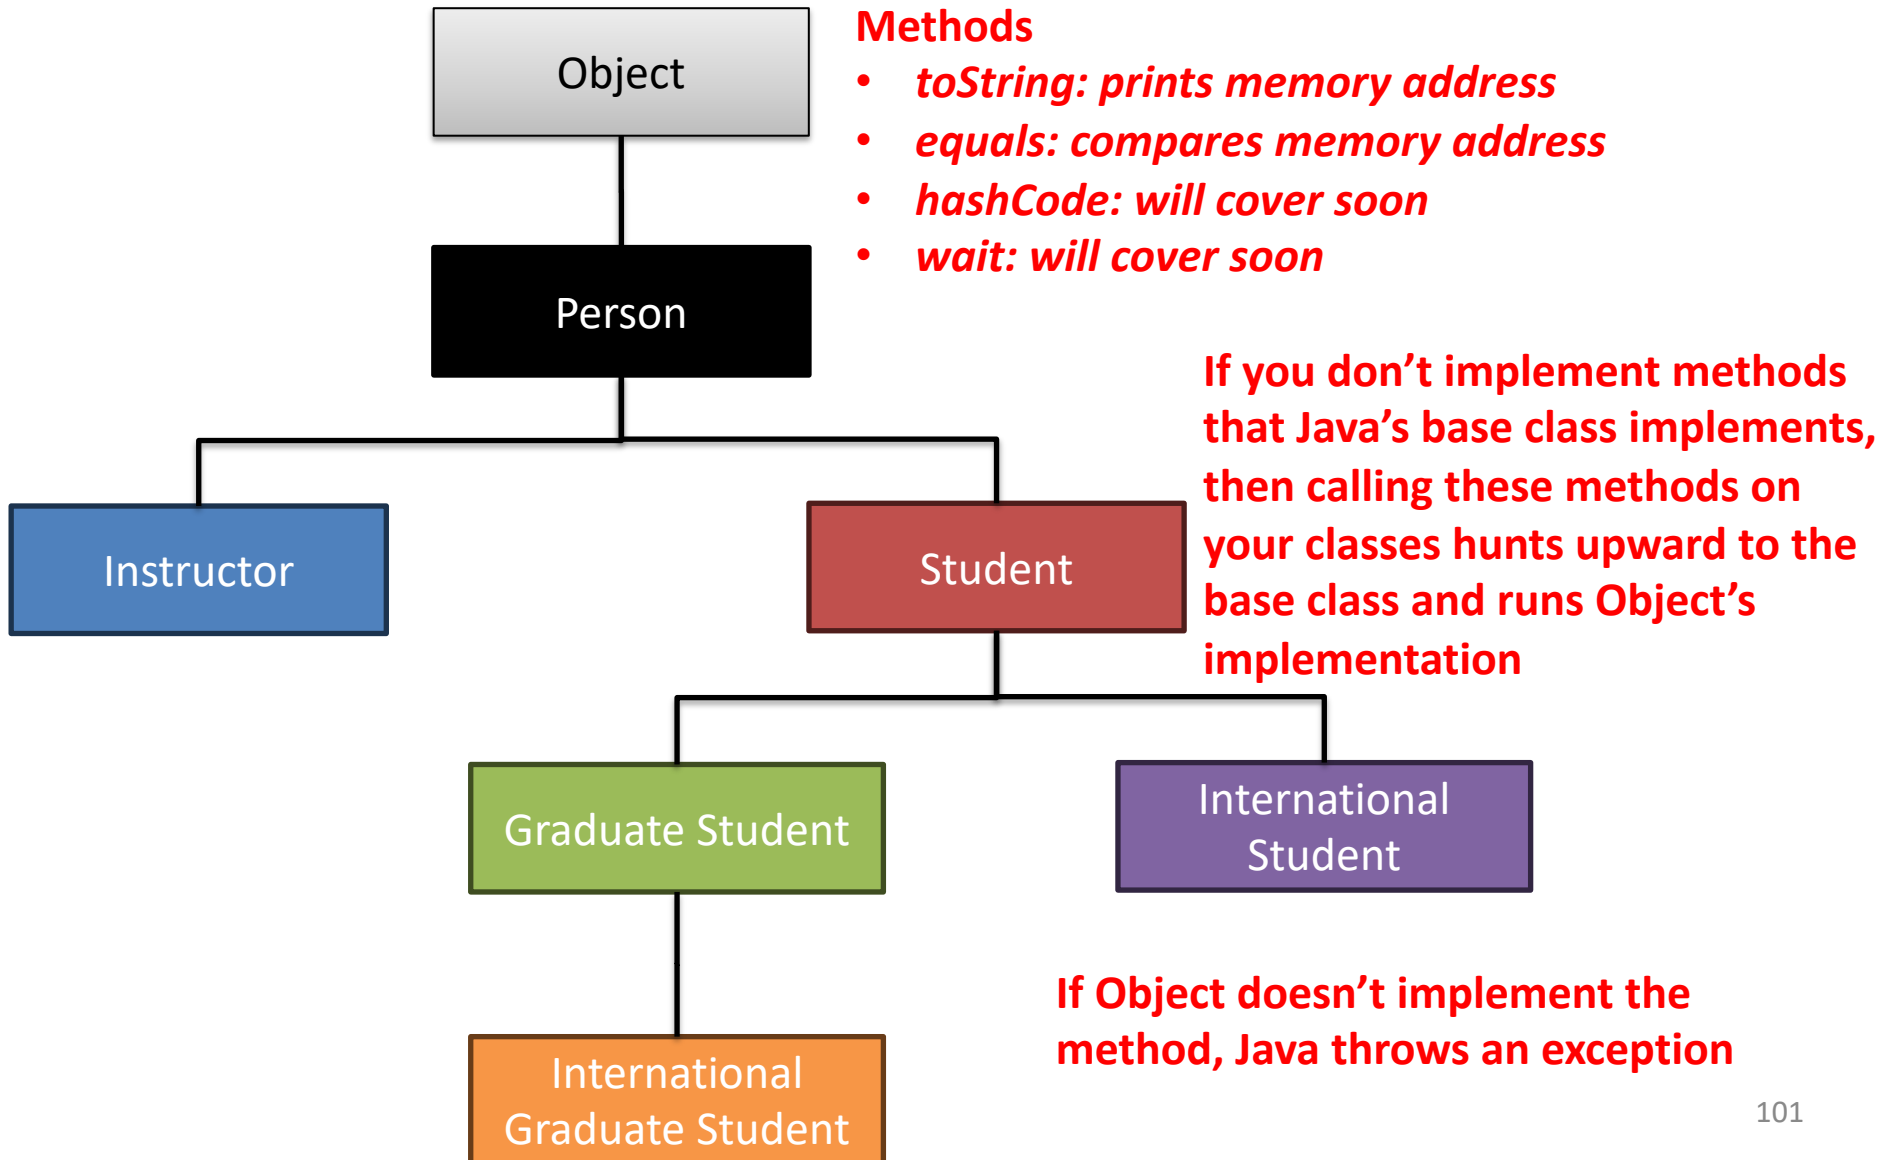

Small example application

ANNOTATED SLIDES

An array that holds Person objects can also hold objects of a subclass type

```
public class CollegeApp {  
    public static void main(String[] args) {  
        //define some people  
        int numberOfPeople = 5;  
        Person[] people = new Person[numberOfPeople];  
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");  
        aql.setDepartment("Computer Science");  
        people[0] = aql;  
    }  
}
```

Create an array of Person objects

CollegeApp.java

Arrays hold one type of object


Remember: an Instructor is a Person, so is a Student

***aql* can go into a *Person* array because *aql* in an *Instructor* and instructors are people too! (e.g., Instructor is a subclass of Person, so it "is a" Person)**

An array that holds Person objects can also hold objects of a subclass type

CollegeApp.java

```
public class CollegeApp {  
    public static void main(String[] args) {  
        //define some people  
        int numberOfPeople = 5;  
        Person[] people = new Person[numberOfPeople];  
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");  
        aql.setDepartment("Computer Science");  
        people[0] = aql;  
        people[1] = new Student("Alice", "f00xyz");  
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science", "Tim Pierson");  
    }  
}
```



There is no need to create a temporary value like *aql*, can just assign an array slot to a new object

Alice (Student) and Bob (GraduateStudent) can go into a Person array because they are also Persons (due to subclass)

An array that holds Person objects can also hold objects of a subclass type

CollegeApp.java

```
public class CollegeApp {  
    public static void main(String[] args) {  
        //define some people  
        int numberOfPeople = 5;  
        Person[] people = new Person[numberOfPeople];  
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");  
        aql.setDepartment("Computer Science");  
        people[0] = aql;  
        people[1] = new Student("Alice", "f00xyz");  
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science", "Tim Pierson");  
        ((Student)people[2]).graduationYear = 2028;  
    }  
}
```

Must cast `people[2]` to a `Student` to access `graduationYear` because `Person` does not have a `graduationYear` instance variable

Casting does not change the type of variable stored in array

An array that holds Person objects can also hold objects of a subclass type

CollegeApp.java

```
public class CollegeApp {  
    public static void main(String[] args) {  
        //define some people  
        int numberOfPeople = 5;  
        Person[] people = new Person[numberOfPeople];  
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");  
        aql.setDepartment("Computer Science");  
        people[0] = aql;  
        people[1] = new Student("Alice", "f00xyz");  
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science", "Tim Pierson");  
        ((Student)people[2]).graduationYear = 2028;  
        people[3] = new InternationalStudent("Charlie", "f00123", "Germany");  
        people[4] = new InternationalGraduateStudent("Denise", "f00987");  
    }  
}
```

Now array *people* holds:

- An Instructor
 - A Student
 - A GraduateStudent
 - An InternationalStudent
 - An InternationalGraduateStudent
- That is ok because they are all *Persons*



Add more people to *Person* array

This time we add an *InternationalStudent* and an *InternationalGraduateStudent*, they are people too

Denise's country?
Null

An array that holds Person objects can also hold objects of a subclass type

CollegeApp.java

```
public class CollegeApp {
    public static void main(String[] args) {
        //define some people
        int numberOfPeople = 5;
        Person[] people = new Person[numberOfPeople];
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");
        aql.setDepartment("Computer Science");
        people[0] = aql;
        people[1] = new Student("Alice", "f00xyz");
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science", "Tim Pierson");
        ((Student)people[2]).graduationYear = 2028;
        people[3] = new InternationalStudent("Charlie", "f00123", "Germany");
        people[4] = new InternationalGraduateStudent("Denise", "f00987");
        ((InternationalGraduateStudent)people[4]).setDepartment("Computer Science");
        ((InternationalGraduateStudent)people[4]).setAdvisorName("Alan Turing");
        ((InternationalGraduateStudent)people[4]).setHomeCountry("Spain");
    }
}
```




Must cast *people[4]* to *InternationalGraduateStudent* to access class-specific instance variables

An array that holds Person objects can also hold objects of a subclass type

```
public class CollegeApp {  
    public static void main(String[] args) {  
        //define some people  
        int numberOfPeople = 5;  
        Person[] people = new Person[numberOfPeople];  
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");  
        aql.setDepartment("Computer Science");  
        people[0] = aql;  
        people[1] = new Student("Alice", "f00xyz");  
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science");  
        ((Student)people[2]).graduationYear = 2028;  
        people[3] = new InternationalStudent("Charlie", "f00123", "Germany");  
        people[4] = new InternationalGraduateStudent("Denise", "f00987");  
        ((InternationalGraduateStudent)people[4]).setDepartment("Computer Science");  
        ((InternationalGraduateStudent)people[4]).setAdvisorName("Alan Turing");  
        ((InternationalGraduateStudent)people[4]).setHomeCountry("Spain");  
    }  
}
```

CollegeApp.java

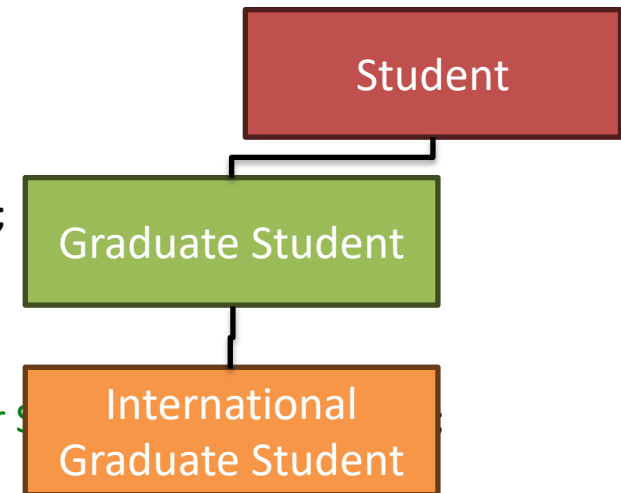

Could we cast to Graduate student instead for Denise?

Yes, only for the first two, as

GraduateStudent defines department and advisor

InternationalGraduateStudents inherit these from GraduateStudent

An array that holds Person objects can also hold objects of a subclass type

CollegeApp.java

```
public class CollegeApp {
    public static void main(String[] args) {
        //define some people
        int numberOfPeople = 5;
        Person[] people = new Person[numberOfPeople];
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");
        aql.setDepartment("Computer Science");
        people[0] = aql;
        people[1] = new Student("Alice", "f00xyz");
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science", "Tim Pierson");
        ((Student)people[2]).graduationYear = 2028;
        people[3] = new InternationalStudent("Charlie", "f00123", "Germany");
        people[4] = new InternationalGraduateStudent("Denise", "f00987");
        ((InternationalGraduateStudent)people[4]).setDepartment("Computer Science");
        ((InternationalGraduateStudent)people[4]).setAdvisorName("Alan Turing");
        ((InternationalGraduateStudent)people[4]).setHomeCountry("Spain");

        //print all people
        for (Person p: people) {
            System.out.println(p + "\n");
        }
    }
}
```

 **Print all people using a for-each loop**

The most specific toString method is called for each object

An array that holds Person objects can also hold objects of a subclass type

```
public class CollegeApp {
    public static void main(String[] args) {
        //define some people
        int numberOfPeople = 5;
        Person[] people = new Person[numberOfPeople];
        Instructor aql = new Instructor("Alberto Quattrini Li", "f00zzz");
        aql.setDepartment("Computer Science");
        people[0] = aql;
        people[1] = new Student("Alice", "f00xyz");
        people[2] = new GraduateStudent("Bob", "f00abc", "Computer Science"
            ((Student)people[2]).graduationYear = 2028;
        people[3] = new InternationalStudent("Charlie", "f00123", "Germany");
        people[4] = new InternationalGraduateStudent("Denise", "f00987");
        ((InternationalGraduateStudent)people[4]).setDepartment("Computer Science");
        ((InternationalGraduateStudent)people[4]).setAdvisorName("Alan Turing");
        ((InternationalGraduateStudent)people[4]).setHomeCountry("Spain");

        //print all people
        for (Person p: people) {
            System.out.println(p + "\n");
        }
    }
}
```

CollegeApp.java

```
Name: Alberto Quattrini Li (f00zzz)
    Tenured: false
    Years Employed: 0
    Department: Computer Science
Name: Alice (f00xyz)
    Graduation year: null
    Hours studying: 0.0
    Hours in class: 0.0
Name: Bob (f00abc)
    Graduation year: 2028
    Hours studying: 0.0
    Hours in class: 0.0
    Hours in the lab: 0.0
    Department: Computer Science
    Advisor: Tim Pierson
Name: Charlie (f00123)
    Graduation year: null
    Hours studying: 0.0
    Hours in class: 0.0
    Home country: Germany
Name: Denise (f00987)
    Graduation year: null
    Hours studying: 0.0
    Hours in class: 0.0
    Hours in the lab: 0.0
    Department: Computer Science
    Advisor: Alan Turing
    Home country: Spain
```

A note about inheritance: you can declare base class and instantiate as subclass

```
Person bob = new Instructor("Bob", "f00000");  
Person carol = new Student("Carol", "f11111");
```


Bob and Carol are declared as Person objects, but instantiated as Instructor and Student respectively

An Instructor "is a" Person, a Student "is a" Person so Java allows this declaration

Why would we ever do such insanity?!?!?

So we can store items in an array, or as we'll see today, in a List


We will declare a List of Person objects that will allow us to hold Instructors and Students

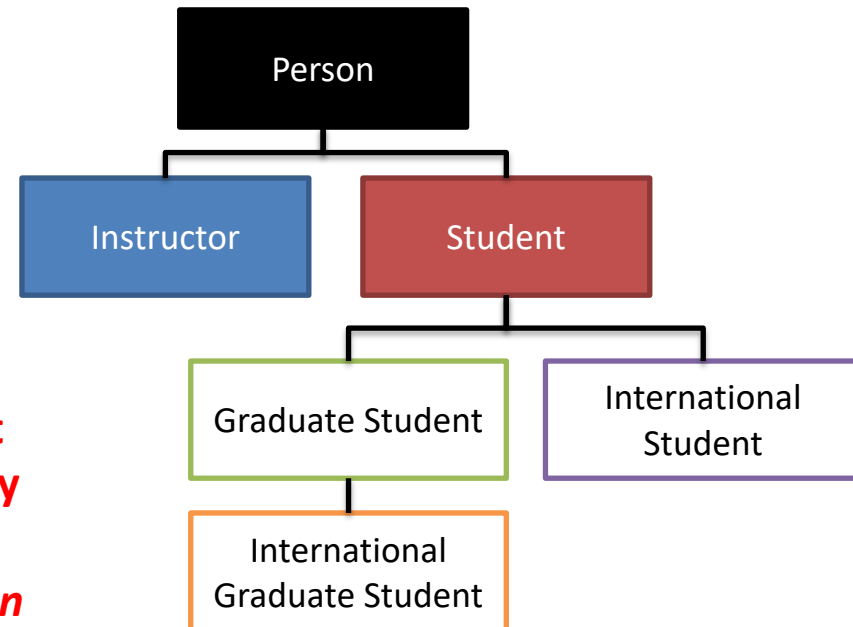

You can cast to the instantiated type

```
Person bob = new Instructor("Bob", "f00000");  
Person carol = new Student("Carol", "f11111");
```

```
((Instructor) bob).tenured = true;  
((Student) carol).graduationYear = 2027;
```

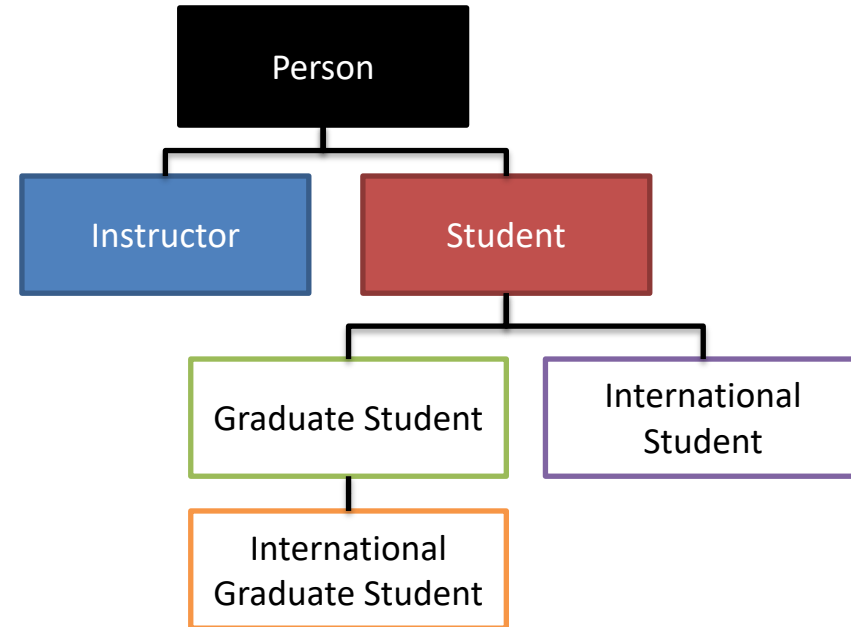

To use subclass specific functionality, we must cast to the subclass

Cast *bob* as an *Instructor* to get tenure (*Person* doesn't have *tenure*)

Cast *carol* as a *Student* to get *graduationYear* (*Person* doesn't have *graduationYear*)

Cannot cast to a type outside the inheritance chain

```
Person bob = new Instructor("Bob", "f00000");  
Person carol = new Student("Carol", "f11111");
```


```
((Instructor) bob).tenured = true;  
((Student) carol).graduationYear = 2027;
```

```
((Student) bob).graduationYear = 2028;
```

Output:

Exception: class Instructor cannot be cast to class Student

Can't cast an object to a subclass outside its inheritance chain
bob* is instantiated as an *Instructor*, can't cast as a *Student

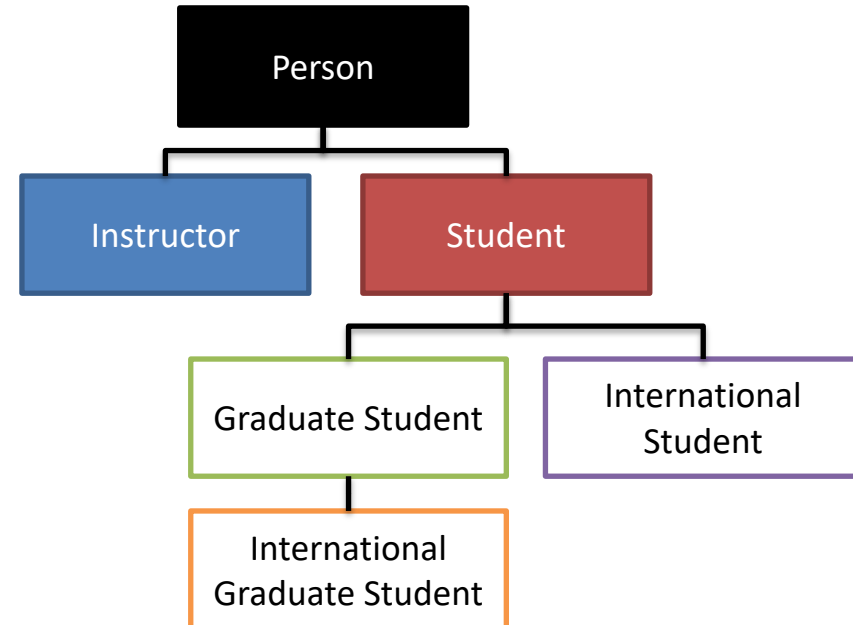

Cannot cast down the inheritance chain

```
Person bob = new Instructor("Bob", "f00000");  
Person carol = new Student("Carol", "f11111");
```

```
((Instructor) bob).tenured = true;  
((Student) carol).graduationYear = 2027;
```


```
((GraduateStudent) carol).graduationYear = 2028;
```

Output:

class Student cannot be cast to class GraduateStudent


Cannot cast down the inheritance chain

***A Student is not necessarily a GraduateStudent
(but a GraduateStudent is a Student)***

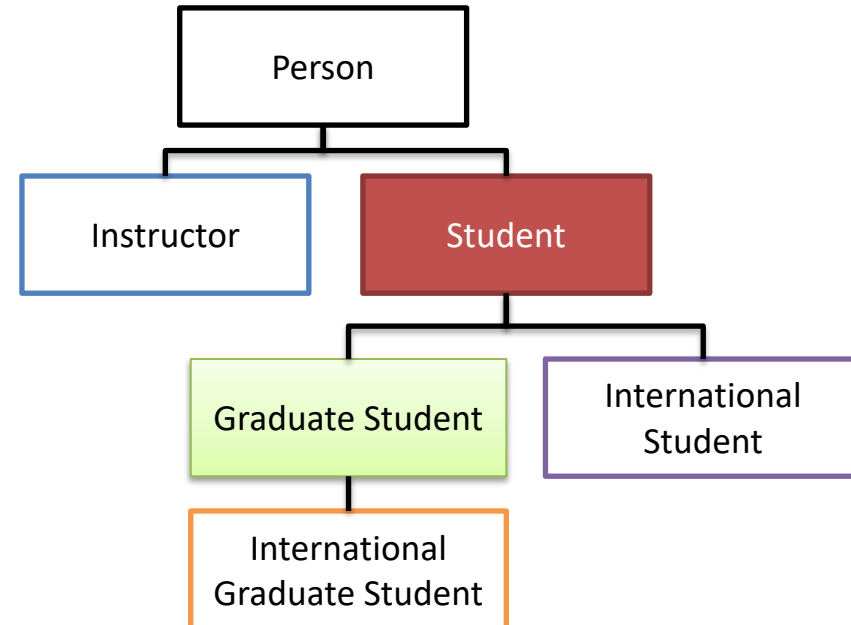

Can cast up the inheritance chain

```
Person bob = new Instructor("Bob", "f00000");  
Person carol = new InternationalGraduateStudent("Carol", "f11111");  
  
((Instructor) bob).tenured = true;  
((Student) carol).graduationYear = 2027;  
  
((GraduateStudent) carol).graduationYear = 2028;
```

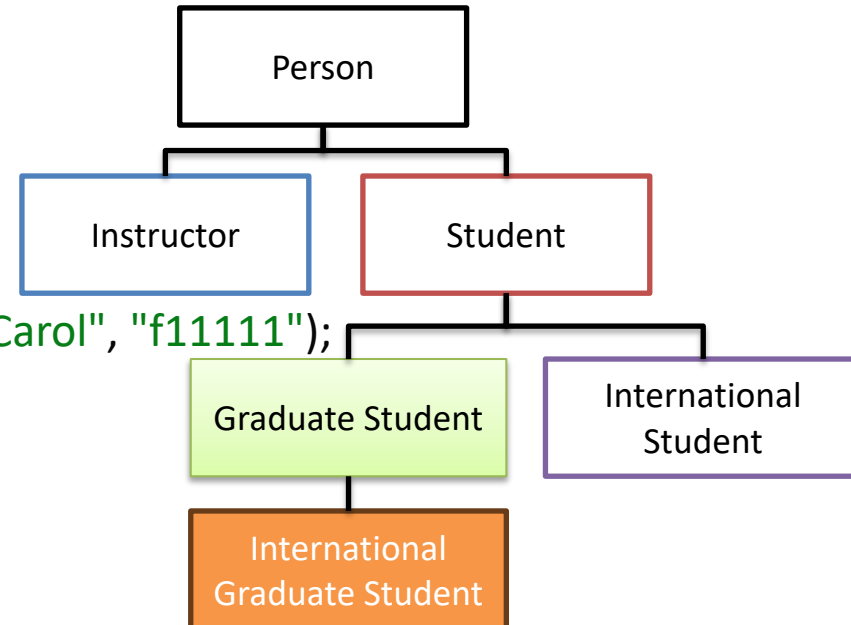

Can cast up the inheritance chain

If *carol* were an *InternationalGraduateStudent*, could be cast to a *GraduateStudent*

An *InternationalGraduateStudent* is a *GraduateStudent*